



# LIT-13300



Adjustable recessed round uplight die cast aluminum body stainless steel incline edge and aluminum reflector. Polycarbonate backbox for installation in ground.

## APPLICATIONS

Landscape and Façade lighting .

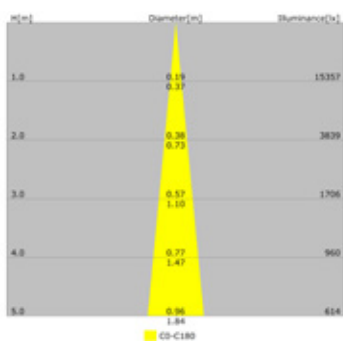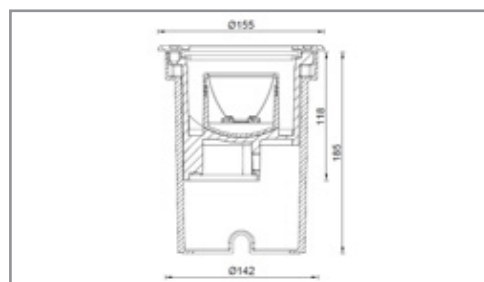

<b>LUMEN, MAINTENANCE &amp; FAILURE RATE</b>	L90/ B10 >80,000 hrs
<b>BODY MATERIAL</b>	Die-cast Aluminium body, Stainless Steel Frame
<b>REFLECTOR</b>	High purity Aluminum, Adjustable ± 15°
<b>DIMENSION</b>	H: 185 mm, D: 155 mm
<b>COLORS</b>	Black Body with Stainless Steel Ring
<b>DIFFUSER</b>	Clear Glass
<b>POWER SUPPLY</b>	Electronic Driver

CODE	LED LUMEN	LUMINAIRE LUMEN	EFFICIENCY	LED WATTAGE	COLOR TEMPERATURE	BEAM ANGEL
4122317	1316lm	892lm	99.2lm/W	9.0W	3000K	11°
4123317	1724lm	1165lm	89.6lm/W	13.0W	3000K	11°

CODE	LED LUMEN	LUMINAIRE LUMEN	EFFICIENCY	LED WATTAGE	COLOR TEMPERATURE	BEAM ANGEL
4122318	1388lm	937lm	104.2lm/W	9.0W	4000K	11°
4123318	1819lm	1230lm	94.6lm/W	13.0W	4000K	11°