




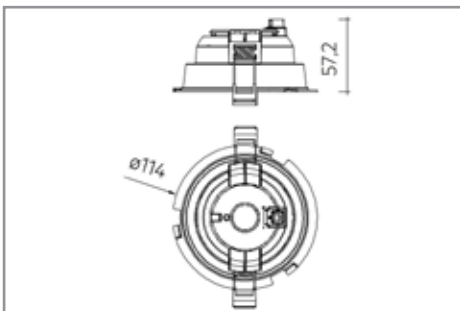


LIT-2850


Recessed fixed downlight finish in white with aluminium reflector or opal diffuser. Overall diameter 114mm, cut out 100mm.

APPLICATIONS

Hotels, banks, offices, receptions, hospitals, showrooms and shopping centers, etc...



IP44 EXT IP20     	
LUMEN, MAINTENANCE & FAILURE RATE	L70/B50 >49,000 hrs
BODY MATERIAL	High purity Aluminium
DIMENSION	H: 90.2mm - D:114mm
COLORS	White
DIFFUSER	Opal diffuser IP44, Reflector IP20
POWER SUPPLY	220-240V integrated power supply

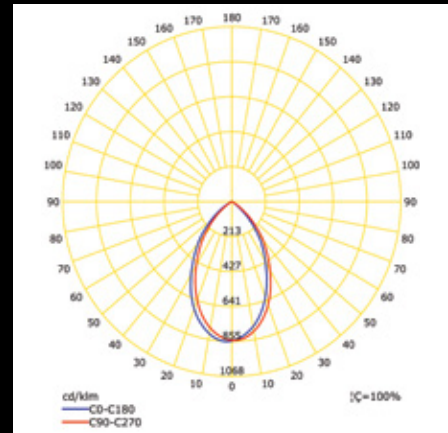

5690112

CODE	LUMINAIRE LUMEN	EFFICIENCY	LED WATTAGE	COLOR TEMPERATURE	BEAM ANGLE
5690111	980lm	96lm/w	10.2W	3000K	Diffuse
5690112	1060lm with refl.	104lm/w	10.2W	3000K	60°
5690121	1030lm	101lm/w	10.2W	4000K	Diffuse
5690122	1110lm with refl.	109lm/w	10.2W	4000K	60°