




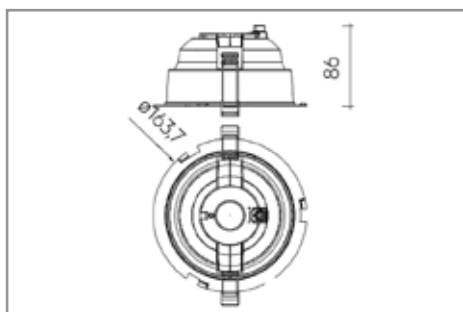


LIT-2860


Recessed fixed downlight finish in white with aluminium reflector or opal diffuser. Overall diameter 164mm, cut out 138mm.

APPLICATIONS

Hotels, banks, offices, receptions, hospitals, showrooms and shopping centers, etc...



| | |
|--|------------------------------------|
| IP44 EXT IP20      | |
| LUMEN, MAINTENANCE & FAILURE RATE | L70/B50 >49,000 hrs |
| BODY MATERIAL | High purity Aluminium |
| DIMENSION | H: 112.5mm - D:164mm |
| COLORS | White |
| DIFFUSER | Opal diffuser IP44, Reflector IP20 |
| POWER SUPPLY | 220-240V integrated power supply |

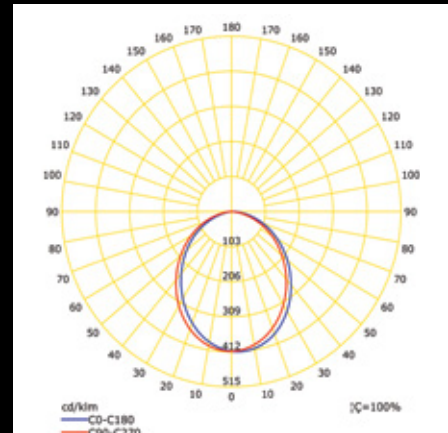

5690221

| CODE | LUMINAIRE LUMEN | EFFICIENCY | LED WATTAGE | COLOR TEMPERATURE | BEAM ANGLE |
|---------|-------------------|------------|-------------|-------------------|------------|
| 5690311 | 1000lm | 99lm/w | 10.1W | 3000K | Diffuse |
| 5690312 | 1100lm with refl. | 109lm/w | 10.1W | 3000K | 60° |
| 5690211 | 1970lm | 97lm/w | 20.2W | 3000K | Diffuse |
| 5690212 | 2130lm with refl. | 105lm/w | 20.2W | 3000K | 60° |
| 5690321 | 1020lm | 101lm/w | 10.1W | 4000K | Diffuse |
| 5690322 | 1120lm with refl. | 111lm/w | 10.1W | 4000K | 60° |
| 5690221 | 2050lm | 101lm/w | 20.2W | 4000K | Diffuse |
| 5690222 | 2210lm with refl. | 109lm/w | 20.2W | 4000K | 60° |



