




# LIT-10100

Shielded bollard with a square cross-section, symmetric light distribution. Characterized by a minimal design, it perfectly adapts to contemporary landscapes. Ideal for illuminating entrances, pathways and gardens.



## LIT-10100 | Bollards

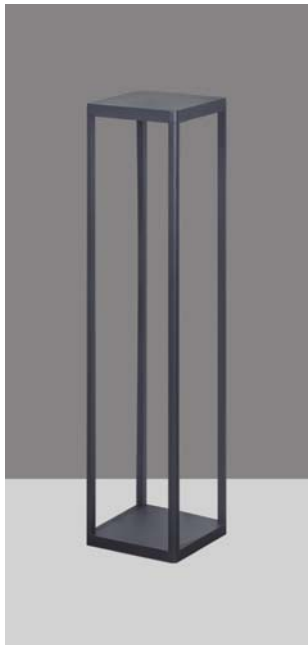

|                                   |                                |
|-----------------------------------|--------------------------------|
| Lumen, maintenance & failure rate | L90/B10<br>>80,000 hrs at 45°C |
| Body material                     | Aluminium body powder coating  |
| Dimensions & Weight               | 180 x 180 x 800mm 2.27 kg      |
| Colors                            | Dark grey                      |
| Diffuser                          | Clear glass                    |
| Power supply                      | Electronic driver              |

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Beam angle |
|---------|-----------|-----------------|------------|-------------|-------------------|------------|
| 4805304 | 1316 lm   | 952 lm          | 105.8lm/w  | 9.0W        | 3000k             | Diffuse    |
| 4815305 | 1388 lm   | 1004 lm         | 111.6lm/w  | 9.0W        | 4000k             | Diffuse    |