



# LIT-10700

Unshielded bollard with one-sided light emission. Characterized by a modern design and a linear silhouette, it perfectly adapts to contemporary landscapes. Ideal for illuminating entrances, pathways and gardens.

## LIT-10700 | Bollards



Lumen, maintenance & failure rate	L80/F10 >55,000 hrs at 45°C
Body material	Aluminium body powder coated
Dimensions & Weight	592 x 70 x 60mm      1.61 kg per 60cm
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Replace model	LIT-B1090

Customizable on request

\*Longer lead time

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
4812104	1763 lm	628 lm	57lm/w	11W	3000k	Diffuse
4812105	1870 lm	666 lm	60.5lm/w	11W	4000k	Diffuse
4832124	2380 lm	848 lm	54.4lm/w	15.6W	3000k	Diffuse
4832125	2523 lm	898 lm	57.6lm/w	15.6W	4000k	Diffuse



Related Products:

LIT-40200







391

# LIT-10700

Unshielded bollard with one-sided light emission. Characterized by a modern design and a linear silhouette, it perfectly adapts to contemporary landscapes. Ideal for illuminating entrances, pathways and gardens.

## LIT-10700 | Bollards

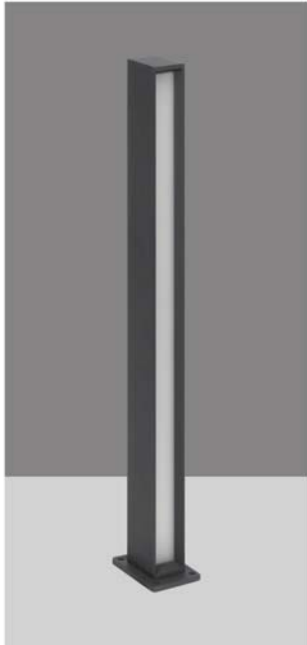


Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 45°C
Body material	Aluminium body powder coated
Dimensions & Weight	872 x 70 x 60mm      2.22 kg per 90cm
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Replace model	LIT-B1060

Customizable on request

\*Longer lead time

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
4832204	2644 lm	878 lm	53.2lm/w	16.5W	3000k	Diffuse
4832205	2805 lm	1000 lm	60.6lm/w	16.5W	4000k	Diffuse
4862224	3570 lm	1272 lm	54.4lm/w	23.4W	3000k	Diffuse
4862225	3785 lm	1348 lm	57.6lm/w	23.4W	4000k	Diffuse

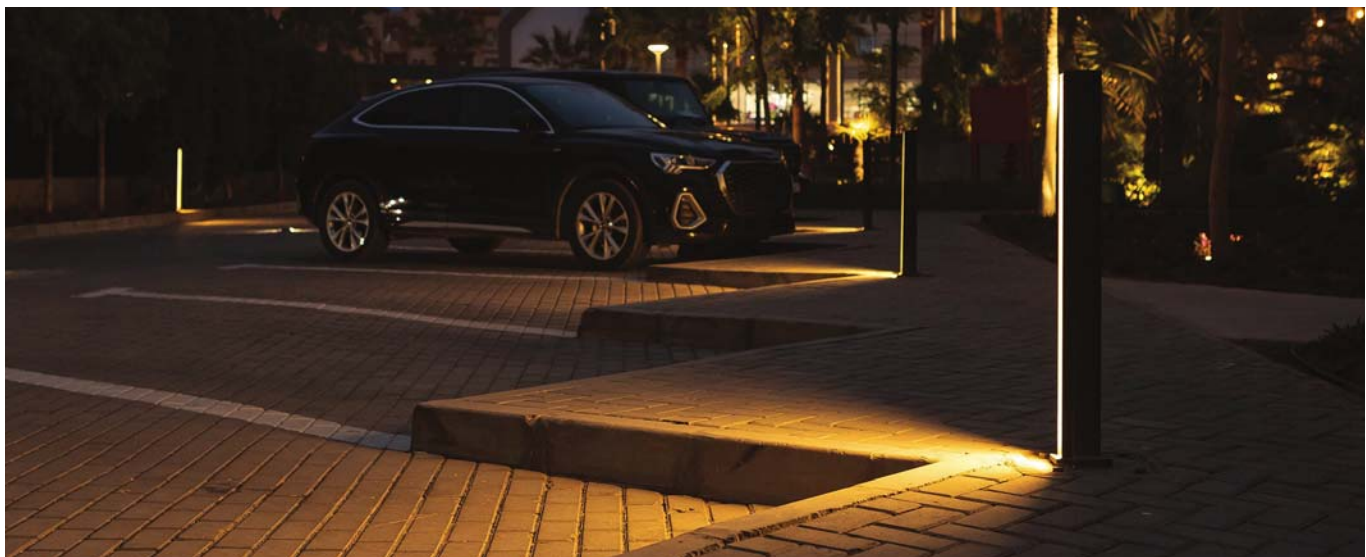

### Related Products:

LIT-40200

