



LIT-1300



Adjustable LED track mounted spotlight for 3 phase circuit tracks, made of die-cast aluminium with a clear glass diffuser.

APPLICATIONS

Museums, Galleries, Showrooms, etc...

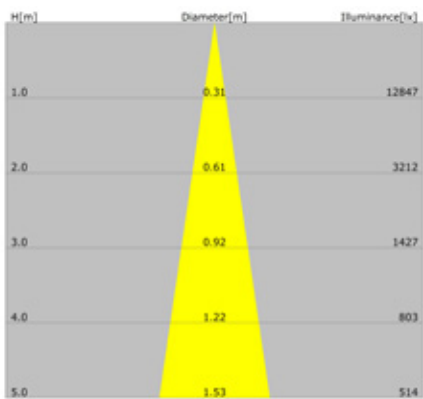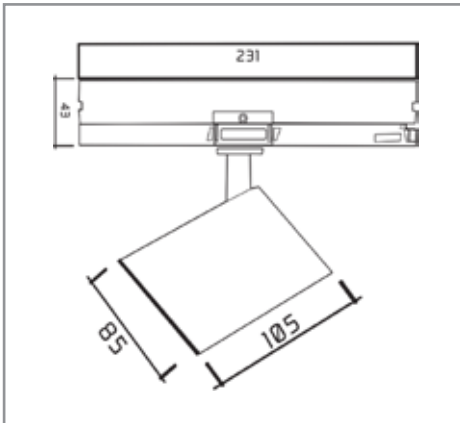

5606311


LUMEN, MAINTENANCE & FAILURE RATE	L90/B10 >70,000 hrs
BODY MATERIAL	Die-cast Aluminium body powder coating
SWIVEL ANGLES	350 degree horizontally and 90 degree vertically
REFLECTOR	High purity Aluminium
DIMENSION	H: 105mm, D: 85mm
COLORS	Check Color Index
DIFFUSER	Clear Glass
POWER SUPPLY	Electronic Driver

CODE	LED LUMEN	LUMINAIRE LUMEN	EFFICIENCY	LED WATTAGE	COLOR TEMPERATURE	BEAM ANGEL
560431X	2700lm	1784lm	102.0lm/w	17.5W	3000K	15°
560433X	2700lm	1784lm	102.0lm/w	17.5W	3000K	45°
560731X	3143lm	2078lm	97.6lm/w	21.3W	3000K	15°
560733X	3143lm	2078lm	97.6lm/w	21.3W	3000K	45°
560531X	3588lm	2373lm	93.8lm/w	25.3W	3000K	15°
560533X	3588lm	2373lm	93.8lm/w	25.3W	3000K	45°
560631X	4617lm	3050lm	95.9lm/w	31.8W	3000K	15°
560633X	4617lm	3050lm	95.9lm/w	31.8W	3000K	45°
560431Y	2851lm	1884lm	107.7lm/w	17.5W	4000K	15°
560433Y	2851lm	1884lm	107.7lm/w	17.5W	4000K	45°
560731Y	3318lm	2192lm	102.9lm/w	21.3W	4000K	15°
560733Y	3318lm	2192lm	102.9lm/w	21.3W	4000K	45°
560531Y	3788lm	2503lm	100.0lm/w	25.3W	4000K	15°
560533Y	3788lm	2503lm	100.0lm/w	25.3W	4000K	45°
560631Y	4848lm	3205lm	100.7lm/w	31.8W	4000K	15°
560633Y	4848lm	3205lm	100.7lm/w	31.8W	4000K	45°

- * **DIMMING SOLUTION: AVAILABLE ON REQUEST (Longer lead time)**
- * **CRI 90 OR HIGHER: AVAILABLE ON REQUEST (Longer lead time)**
- * **SPECIAL COLOR: AVAILABLE ON REQUEST (Longer lead time and minimum quantity order)**
- * **SPECIAL BEAM ANGLES: AVAILABLE ON REQUEST (Longer lead time and minimum quantity order)**
- * **SPECIAL COLOR TEMPERATURE: AVAILABLE ON REQUEST (Longer lead time)**

COLOR INDEX		
	White	Black
X	1	7
Y	2	8

ACCESSORIES



HONEYCOMB LOUVER

CODE	HC1
TECHNICAL DATA	For high visual comfort in exhibition areas by limiting the light cone and by reducing the glare.
BODY MATERIAL	Aluminium
COLOR	Black