


## LIT-2420









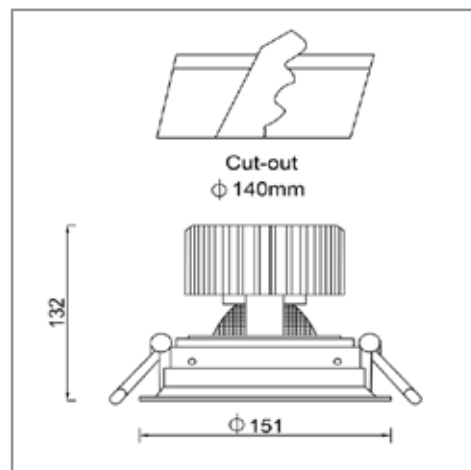


Recessed adjustable Spotlights finish in white with aluminium reflector. Overall diameter 151mm, cut out 140mm.

### APPLICATIONS

Hotels, offices, receptions, hospitals, showrooms and shopping centers.



       	
<b>LUMEN, MAINTENANCE &amp; FAILURE RATE</b>	L90/B10 >70,000 hrs
<b>BODY MATERIAL</b>	Die-cast Aluminium body powder coating
<b>REFLECTOR</b>	High purity Aluminium
<b>DIMENSION</b>	D: 151mm x W: 132mm
<b>COLORS</b>	White (Other colors are available upon request)
<b>DIFFUSER</b>	Clear glass
<b>POWER SUPPLY</b>	Electronic Driver

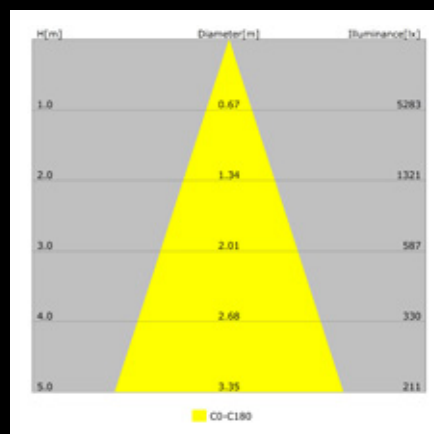

5624622

CODE	LED LUMEN	LUMINAIRE LUMEN	EFFICIENCY	LED WATTAGE	COLOR TEMPERATURE	BEAM ANGEL
5624621	2700lm	2000lm	114.3lm/w	17.5w	3000K	45°
5627621	3143lm	2330lm	114.2lm/w	21.3w	3000K	45°
5625621	3588lm	2657lm	105.0lm/w	25.3w	3000K	45°
5626621	4617lm	3420lm	107.5lm/w	31.8w	3000K	45°
5624622	2851lm	2111lm	120.6lm/w	17.5w	4000K	45°
5627622	3318lm	2460lm	115.5lm/w	21.3w	4000K	45°
5625622	3788lm	2808lm	111.0lm/w	25.3w	4000K	45°
5626622	4848lm	3590lm	112.8lm/w	31.8w	4000K	45°

- \* **DIMMING SOLUTION: AVAILABLE ON REQUEST (Longer lead time)**
- \* **SPECIAL COLOR: AVAILABLE ON REQUEST (Longer lead time and minimum quantity order)**
- \* **SPECIAL BEAM ANGLES: AVAILABLE ON REQUEST (Longer lead time and minimum quantity order)**
- \* **SPECIAL COLOR TEMPERATURE: AVAILABLE ON REQUEST (Longer lead time)**