

LIT-25100

Durable recessed in wall step light. Made of high-quality materials for long-lasting performance. A sleek design that blends seamlessly into any landscape.

LIT-25100 | Wall lamps | Recessed in-wall


SELV

CRI
80

SDCM
3

IP67

CE

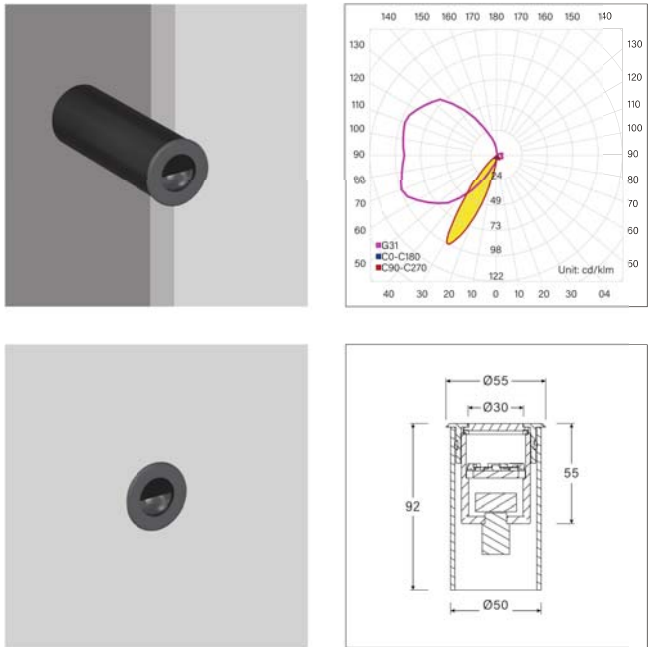

Lumen, maintenance & failure rate	L80/B50 >60,000 hrs at 45°C
Body material	Aluminium body
Dimensions & Weight	H 92mm D 55mm0.90 kg
Colors	Stainless steel
Diffuser	Clear glass
Power supply	External 24V DC driver
Reflector	High efficiency asymetrical optical lens

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
4753764	204 lm	50 lm	27.1lm/w	1.86W	3000k	Asymmetrical
4753765	237 lm	58 lm	31.5lm/w	1.86W	4000k	Asymmetrical

Accessories

Element	IP 67 DRIVER 30W, 24V	
Max.	6 pcs/ Driver	
Code	186633	

Model	2 ways IP connector 3 poles	
IP Rate	IP68	
Code	0100010	

Model	2 ways IP connector 4 poles	
IP Rate	IP68	
Code	0100020	

Model	3 ways IP connector 3 poles	
IP Rate	IP68	
Code	0101010	

Model	3 ways IP connector 4 poles	
IP Rate	IP68	
Code	0101020	