



LIT-2810

Fixed recessed downlight with a functional design. Overall diameter of 105mm – the smallest solution within this range. Uniform lighting distribution ideal for general applications.



LIT-2810 | Downlights | Recessed



Lumen, maintenance & failure rate	L80/B10 >80,000 hrs at 25°C
Body material	Aluminium body powder coating
Dimensions & Weight	H 60mm D 105mm 0.35 kg
Colors	White
Diffuser	Opal
Power supply	Electronic Driver
Reflector	White Polycarbonate

Customizable on request



Dimmable




>90
CRI



Color
Temperature



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Beam Angle
5640441	1316 lm	775 lm	86.2lm/w	9.0W	3000k	60°
5640442	1388 lm	816 lm	90.7lm/w	9.0W	4000k	60°
5643441	1724 lm	1015 lm	78.0lm/w	13.0W	3000k	60°
5643442	1819 lm	1070 lm	82.3lm/w	13.0W	4000k	60°

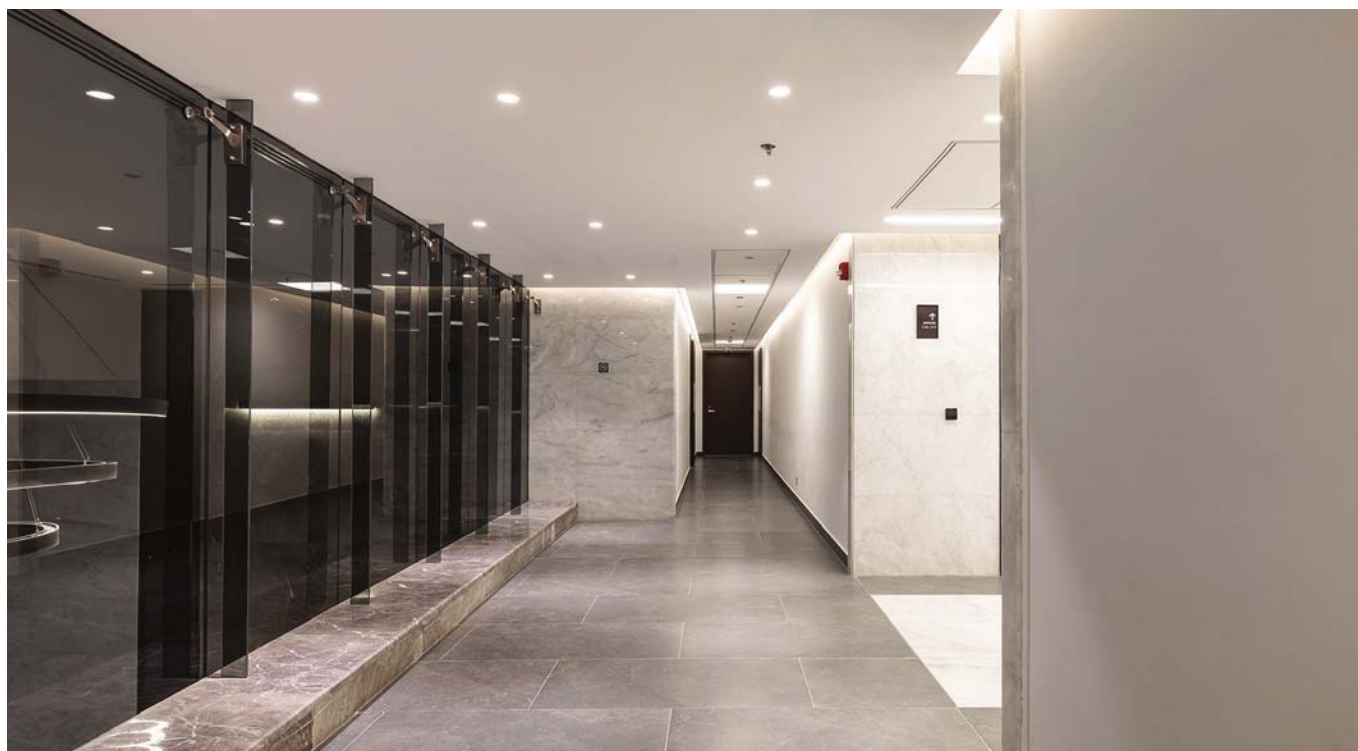

LIT-2810

Fixed recessed downlight with silver reflector. Overall diameter of 105mm – the smallest solution within this range. Uniform lighting distribution ideal for general applications.



LIT-2810 | Downlights | Recessed



Lumen, maintenance & failure rate	L80/B10 >80,000 hrs at 25°C
Body material	Aluminium body powder coating
Dimensions & Weight	H 60mm D 105mm 0.35 kg
Colors	White
Diffuser	Opal
Power supply	Electronic Driver
Reflector	Shining silver

Customizable on request



Dimmable



>90 CRI



Color Temperature

*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Beam Angle
6314251	1316 lm	855 lm	95.0lm/w	9.0W	3000k	60°
6314252	1388 lm	900 lm	100.0lm/w	9.0W	4000k	60°
6314351	1724 lm	1120 lm	86.2lm/w	13.0W	3000k	60°
6314352	1819 lm	1200 lm	92.3lm/w	13.0W	4000k	60°