
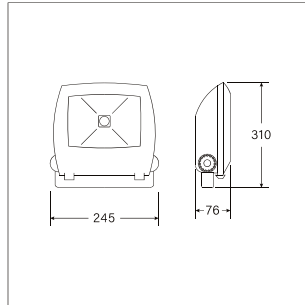
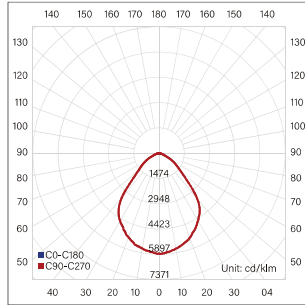


LIT-37100

High-performance floodlight using high efficiency LED chips with high thermal conductivity, low luminous decay, and pure light color used for multiple outdoor applications. The smallest solution within this range.


LIT-37100 | Flood lighting




Lumen, maintenance & failure rate	L90/B10 >80,000 hrs at 45°C
Dimensions & Weight	310 x 245 x 76mm 4.45 kg
Colors	Grey
Diffuser	Tempered glass
Power supply	Electronic driver
Replacing model	LIT-Flood 75

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
4525167	7383 lm	5782 lm	116.3lm/w	49.7W	3000k	Wide beam
4525168	7774 lm	6087 lm	122.5lm/w	49.7W	4000k	Wide beam


Tennis court

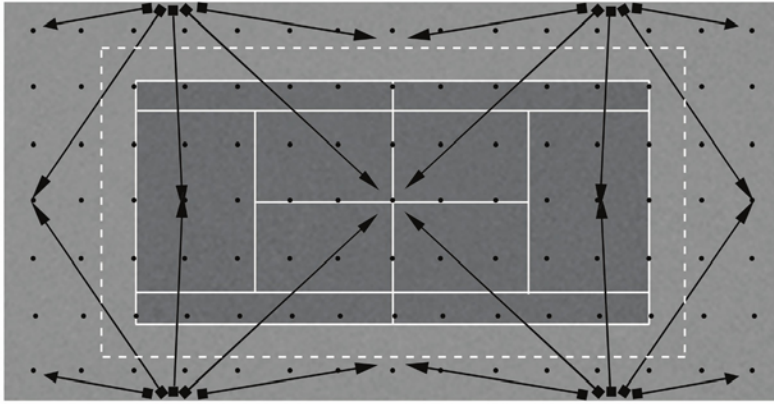

Soccer court

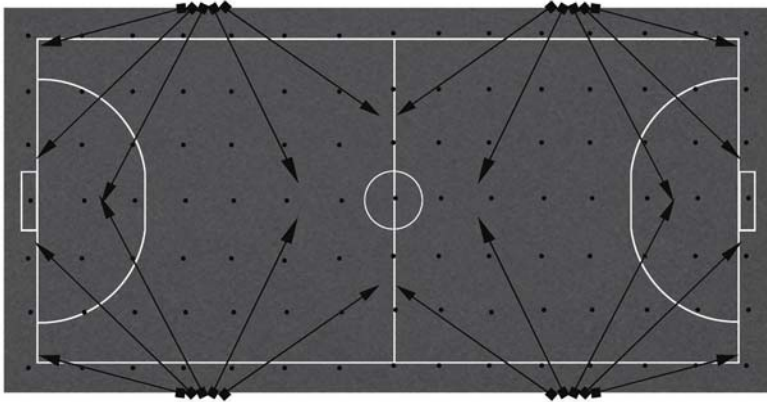

MP court

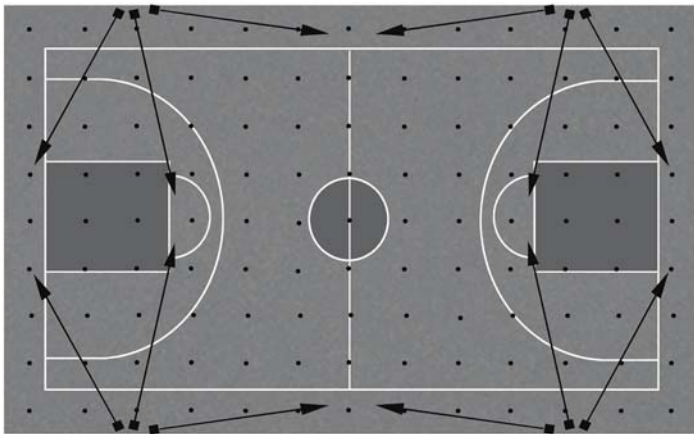

Basketball court

