


## LIT-4110







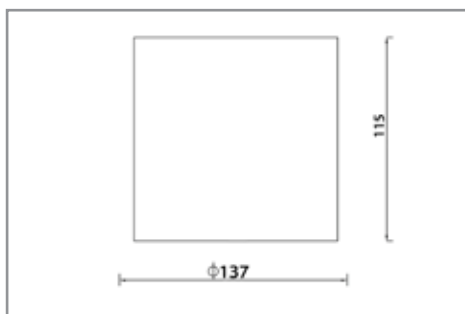


Surface mounted downlight finish in White with aluminium reflector. Overall diameter 137mm

### APPLICATIONS

Hotels, Banks, offices, Receptions, Hospitals, Show rooms and Shopping centers.



|   |  |
|---|--|
|  <b>IP20</b>       |  |
| <b>LUMEN, MAINTENANCE &amp; FAILURE RATE</b>  | L90/B10<br>>80,000 hrs                             |
| <b>BODY MATERIAL</b>  | Die-cast Aluminium body powder coating             |
| <b>REFLECTOR</b>  | High purity Aluminium                              |
| <b>DIMENSION</b>  | H: 115mm, D:137mm                                  |
| <b>COLORS</b>   | White<br>(Other colors are available upon request) |
| <b>DIFFUSER</b>   | Clear Glass  |
| <b>POWER SUPPLY</b>   | Electronic Driver                                  |

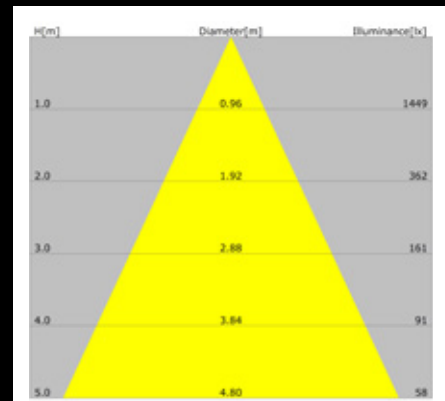

 C0-C180  
**5653522**

| CODE    | LED LUMEN | LUMINAIRE LUMEN | EFFICIENCY | LED WATTAGE | COLOR TEMPERATURE | BEAM ANGEL |
|---------|-----------|-----------------|------------|-------------|-------------------|------------|
| 5652521 | 1316lm    | 951lm           | 105.7lm/w  | 9.0W        | 3000K             | 50°        |
| 5653521 | 1724lm    | 1241lm          | 95.5lm/w   | 13.0W       | 3000K             | 50°        |
| 5652522 | 1388lm    | 1000lm          | 111.2lm/w  | 9.0W        | 4000K             | 50°        |
| 5653522 | 1819lm    | 1310lm          | 100.8lm/w  | 13.0W       | 4000K             | 50°        |

\* **SPECIAL COLOR: AVAILABLE ON REQUEST** (Longer lead time and minimum quantity order)

\* **SPECIAL COLOR TEMPERATURE: AVAILABLE ON REQUEST** (Longer lead time)





