



LIT-7100

Linear batten luminaire with a customizable optical diffuser that can be connected seamlessly in a continuous row. Surface-mounted or suspended, quick and easy to install providing a flexible solution for several applications.

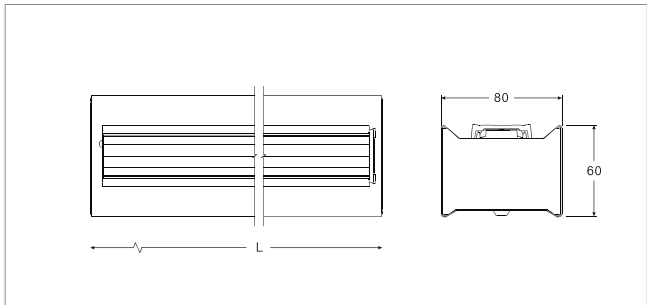

LIT-7100 | Industrial Luminaires | Lens





Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	White painted steel sheet
Dimensions & Weight	58-114cm x 8cm x 6cm 3.11 kg per 114cm
Colors	White
Diffuser	Optical lens
Power supply	Electronic driver

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
7211451	2430 lm	1880 lm	117.5lm/w	16W	3000k	580mm
7211452	2560 lm	1980 lm	123.7lm/w	16W	4000k	580mm
7213451	4860 lm	3760 lm	117.5lm/w	32W	3000k	1140mm
7213452	5120 lm	3960 lm	123.7lm/w	32W	4000k	1140mm

LIT-7100

Linear batten luminaire with a round opal diffuser that can be connected in a continuous row for a uniform lighting distribution. Surface-mounted or suspended, quick and easy to install providing a flexible solution for several applications.

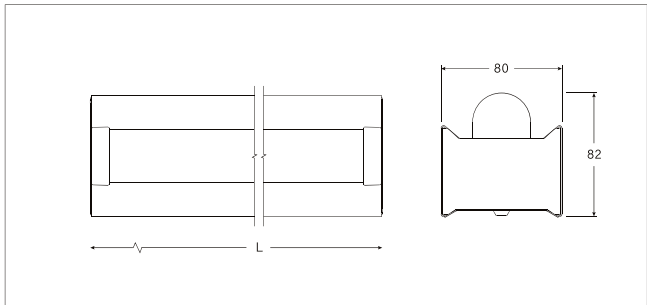

LIT-7100 | Industrial Luminaires | Opal



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	White painted steel sheet
Dimensions & Weight	58-114cm x 8cm x 8.2cm 3.11 kg per 114cm
Colors	White
Diffuser	Opal
Power supply	Electronic driver

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
7221451	2430 lm	1590 lm	99.3lm/w	16W	3000k	580mm
7221452	2560 lm	1675 lm	104.6lm/w	16W	4000k	580mm
7223451	4860 lm	3180 lm	99.3lm/w	32W	3000k	1140mm
7223452	5120 lm	3350 lm	104.6lm/w	32W	4000k	1140mm