



LIT-SYS L20

Ultra slim linear system with stainless steel suspension. A modern lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

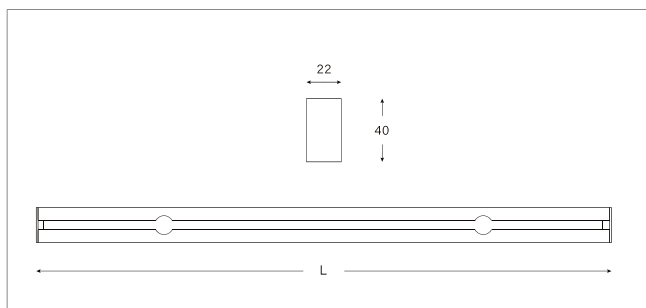

LIT-SYS L20 | Linear Systems | Suspended



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 40mm W 22mm 1.85 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Suspended mounting

Customizable on request



Dimmable



length



connection

*Longer lead time



Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
723125X	2076 lm	1105 lm	94.4lm/w	11.7W	3000k	570mm
723121X	2890 lm	1540 lm	90.0lm/w	17.1W	3000k	570mm
723225X	3114 lm	1660 lm	94.3lm/w	17.6W	3000k	850mm
723221X	4340 lm	2310 lm	90.2lm/w	25.6W	3000k	850mm
723325X	4152 lm	2210 lm	94.4lm/w	23.4W	3000k	1130mm
723321X	5780 lm	3080 lm	90.0lm/w	34.2W	3000k	1130mm
723425X	5190 lm	2765 lm	94.3lm/w	29.3W	3000k	1410mm
723423X	7230 lm	3850 lm	90.1lm/w	42.7W	3000k	1410mm
723125Y	2183 lm	1165 lm	99.5lm/w	11.7W	4000k	570mm
723121Y	3040 lm	1620 lm	94.7lm/w	17.1W	4000k	570mm
723225Y	3274 lm	1745 lm	99.1lm/w	17.6W	4000k	850mm
723221Y	4560 lm	2430 lm	94.9lm/w	25.6W	4000k	850mm
723325Y	4366 lm	2325 lm	99.3lm/w	23.4W	4000k	1130mm
723321Y	6080 lm	3240 lm	94.7lm/w	34.2W	4000k	1130mm
723425Y	5457 lm	2905 lm	99.1lm/w	29.3W	4000k	1410mm
723423Y	7600 lm	4050 lm	94.8lm/w	42.7W	4000k	1410mm

Code	White	Grey	Black
X	1	3	5
Y	2	4	6

LIT-SYS L20

Ultra slim ceiling-mounted linear system. A modern lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

LIT-SYS L20 | Linear Systems | Ceiling Mounted

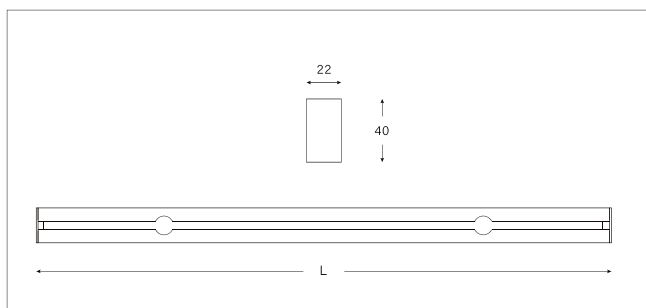

Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Extruded Aluminium
Dimensions & Weight	H 40mm W 22mm 1.85 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Ceiling mounted

Customizable on request



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
722125X	2076 lm	1105 lm	94.4lm/w	11.7W	3000k	570mm
722121X	2890 lm	1540 lm	90.0lm/w	17.1W	3000k	570mm
722225X	3114 lm	1660 lm	94.3lm/w	17.6W	3000k	850mm
722221X	4340 lm	2310 lm	90.2lm/w	25.6W	3000k	850mm
722325X	4152 lm	2210 lm	94.4lm/w	23.4W	3000k	1130mm
722321X	5780 lm	3080 lm	90.0lm/w	34.2W	3000k	1130mm
722425X	5190 lm	2765 lm	94.3lm/w	29.3W	3000k	1410mm
722423X	7230 lm	3850 lm	90.1lm/w	42.7W	3000k	1410mm
722125Y	2183 lm	1165 lm	99.5lm/w	11.7W	4000k	570mm
722121Y	3040 lm	1620 lm	94.7lm/w	17.1W	4000k	570mm
722225Y	3274 lm	1745 lm	99.1lm/w	17.6W	4000k	850mm
722221Y	4560 lm	2430 lm	94.9lm/w	25.6W	4000k	850mm
722325Y	4366 lm	2325 lm	99.3lm/w	23.4W	4000k	1130mm
722321Y	6080 lm	3240 lm	94.7lm/w	34.2W	4000k	1130mm
722425Y	5457 lm	2905 lm	99.1lm/w	29.3W	4000k	1410mm
722423Y	7600 lm	4050 lm	94.8lm/w	42.7W	4000k	1410mm

Code	White	Grey	Black
X	1	3	5
Y	2	4	6