



LIT-SYS L20R

Ultra slim recessed linear system with trim. A modern lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

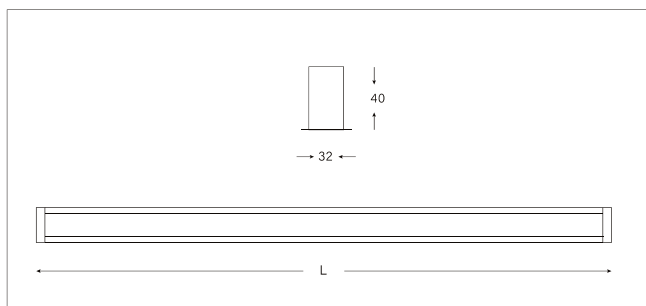

LIT-SYS L20R | Linear Systems | Recessed



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Extruded Aluminium
Dimensions & Weight	H 40mm W 32mm 1,45 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Recessed mounting

Customizable on request



*Longer lead time



Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
726125X	2076 lm	1105 lm	94.4lm/w	11.7W	3000k	580mm
726121X	2890 lm	1540 lm	90.0lm/w	17.1W	3000k	580mm
726225X	3114 lm	1660 lm	94.3lm/w	17.6W	3000k	860mm
726221X	4340 lm	2310 lm	90.2lm/w	25.6W	3000k	860mm
726325X	4152 lm	2210 lm	94.4lm/w	23.4W	3000k	1140mm
726321X	5780 lm	3080 lm	90.0lm/w	34.2W	3000k	1140mm
726425X	5190 lm	2765 lm	94.3lm/w	29.3W	3000k	1420mm
726423X	7230 lm	3850 lm	90.1lm/w	42.7W	3000k	1420mm
726125Y	2183 lm	1165 lm	99.5lm/w	11.7W	4000k	580mm
726121Y	3040 lm	1620 lm	94.7lm/w	17.1W	4000k	580mm
726225Y	3274 lm	1745 lm	99.1lm/w	17.6W	4000k	860mm
726221Y	4560 lm	2430 lm	94.9lm/w	25.6W	4000k	860mm
726325Y	4366 lm	2325 lm	99.3lm/w	23.4W	4000k	1140mm
726321Y	6080 lm	3240 lm	94.7lm/w	34.2W	4000k	1140mm
726425Y	5457 lm	2905 lm	99.1lm/w	29.3W	4000k	1420mm
726423Y	7600 lm	4050 lm	94.8lm/w	42.7W	4000k	1420mm

Code	White	Grey	Black
X	1	3	5
Y	2	4	6

