


LIT-40100

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

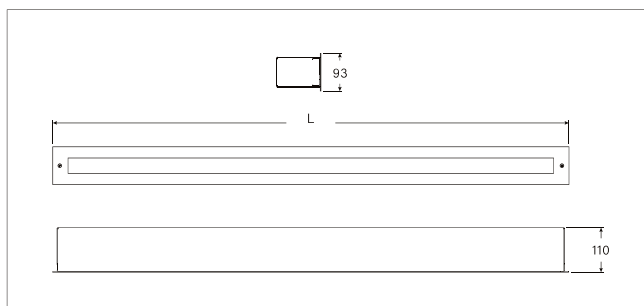

Standard input cable options (High efficiency: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310815	840 lm	720 lm	84.7lm/w	8.5W	3000k	357mm
4311815	1680 lm	1470 lm	84.7lm/w	17W	3000k	657mm
4312815	2520 lm	2160 lm	84.7lm/w	25.5W	3000k	957mm
4313815	3360 lm	2880 lm	84.7lm/w	34W	3000k	1257mm
4310816	840 lm	720 lm	84.7lm/w	8.5W	4000k	357mm
4311816	1680 lm	1470 lm	84.7lm/w	17W	4000k	657mm
4312816	2520 lm	2160 lm	84.7lm/w	25.5W	4000k	957mm
4313816	3360 lm	2880 lm	84.7lm/w	34W	4000k	1257mm


In & Out input cable options (High efficiency: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330815	840 lm	720 lm	84.7lm/w	8.5W	3000k	357mm
4331815	1680 lm	1470 lm	84.7lm/w	17W	3000k	657mm
4332815	2520 lm	2160 lm	84.7lm/w	25.5W	3000k	957mm
4333815	3360 lm	2880 lm	84.7lm/w	34W	3000k	1257mm
4330816	840 lm	720 lm	84.7lm/w	8.5W	4000k	357mm
4331816	1680 lm	1470 lm	84.7lm/w	17W	4000k	657mm
4332816	2520 lm	2160 lm	84.7lm/w	25.5W	4000k	957mm
4333816	3360 lm	2880 lm	84.7lm/w	34W	4000k	1257mm

LIT-40100


IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.

LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

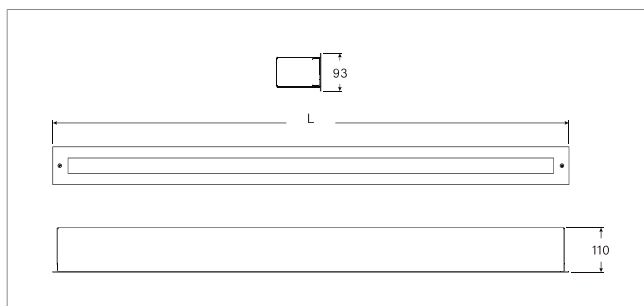

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

Standard input cable options (High efficiency: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310515	590 lm	505 lm	84.2lm/w	6W	3000k	357mm
4311515	1180 lm	1010 lm	84.2lm/w	12W	3000k	657mm
4312515	1770 lm	1515 lm	84.2lm/w	18W	3000k	957mm
4313515	2360 lm	2020 lm	84.2lm/w	24W	3000k	1257mm
4310516	590 lm	505 lm	84.2lm/w	6W	4000k	357mm
4311516	1180 lm	1010 lm	84.2lm/w	12W	4000k	657mm
4312516	1770 lm	1515 lm	84.2lm/w	12W	4000k	957mm
4313516	2360 lm	2020 lm	84.2lm/w	24W	4000k	1257mm


In & Out input cable options (High efficiency: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330515	590 lm	505 lm	84.2lm/w	6W	3000k	357mm
4331515	1180 lm	1010 lm	84.2lm/w	12W	3000k	657mm
4332515	1770 lm	1515 lm	84.2lm/w	18W	3000k	957mm
4333515	2360 lm	2020 lm	84.2lm/w	24W	3000k	1257mm
4330516	590 lm	505 lm	84.2lm/w	6W	4000k	357mm
4331516	1180 lm	1010 lm	84.2lm/w	12W	4000k	657mm
4332516	1770 lm	1515 lm	84.2lm/w	12W	4000k	957mm
4333516	2360 lm	2020 lm	84.2lm/w	24W	4000k	1257mm

LIT-40100


IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.

LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

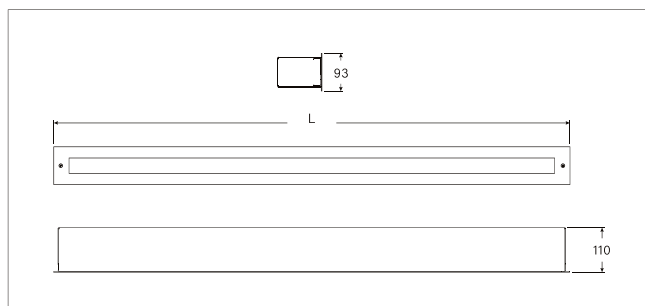


Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

Standard input cable options (High efficiency: 250mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310315	420 lm	360 lm	84.2lm/w	4.3W	3000k	357mm
4311315	840 lm	720 lm	84.2lm/w	8.6W	3000k	657mm
4312315	1260 lm	1080 lm	84.2lm/w	12.9W	3000k	957mm
4313315	1680 lm	1440 lm	84.2lm/w	17.2W	3000k	1257mm
4310316	420 lm	360 lm	84.2lm/w	4.3W	4000k	357mm
4311316	840 lm	720 lm	84.2lm/w	8.6W	4000k	657mm
4312316	1260 lm	1080 lm	84.2lm/w	12.9W	4000k	957mm
4313316	1680 lm	1440 lm	84.2lm/w	17.2W	4000k	1257mm

In & Out input cable options (High efficiency: 250mA)


Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330315	420 lm	360 lm	84.2lm/w	4.3W	3000k	357mm
4331315	840 lm	720 lm	84.2lm/w	8.6W	3000k	657mm
4332315	1260 lm	1080 lm	84.2lm/w	12.9W	3000k	957mm
4333315	1680 lm	1440 lm	84.2lm/w	17.2W	3000k	1257mm
4330316	420 lm	360 lm	84.2lm/w	4.3W	4000k	357mm
4331316	840 lm	720 lm	84.2lm/w	8.6W	4000k	657mm
4332316	1260 lm	1080 lm	84.2lm/w	12.9W	4000k	957mm
4333316	1680 lm	1440 lm	84.2lm/w	17.2W	4000k	1257mm

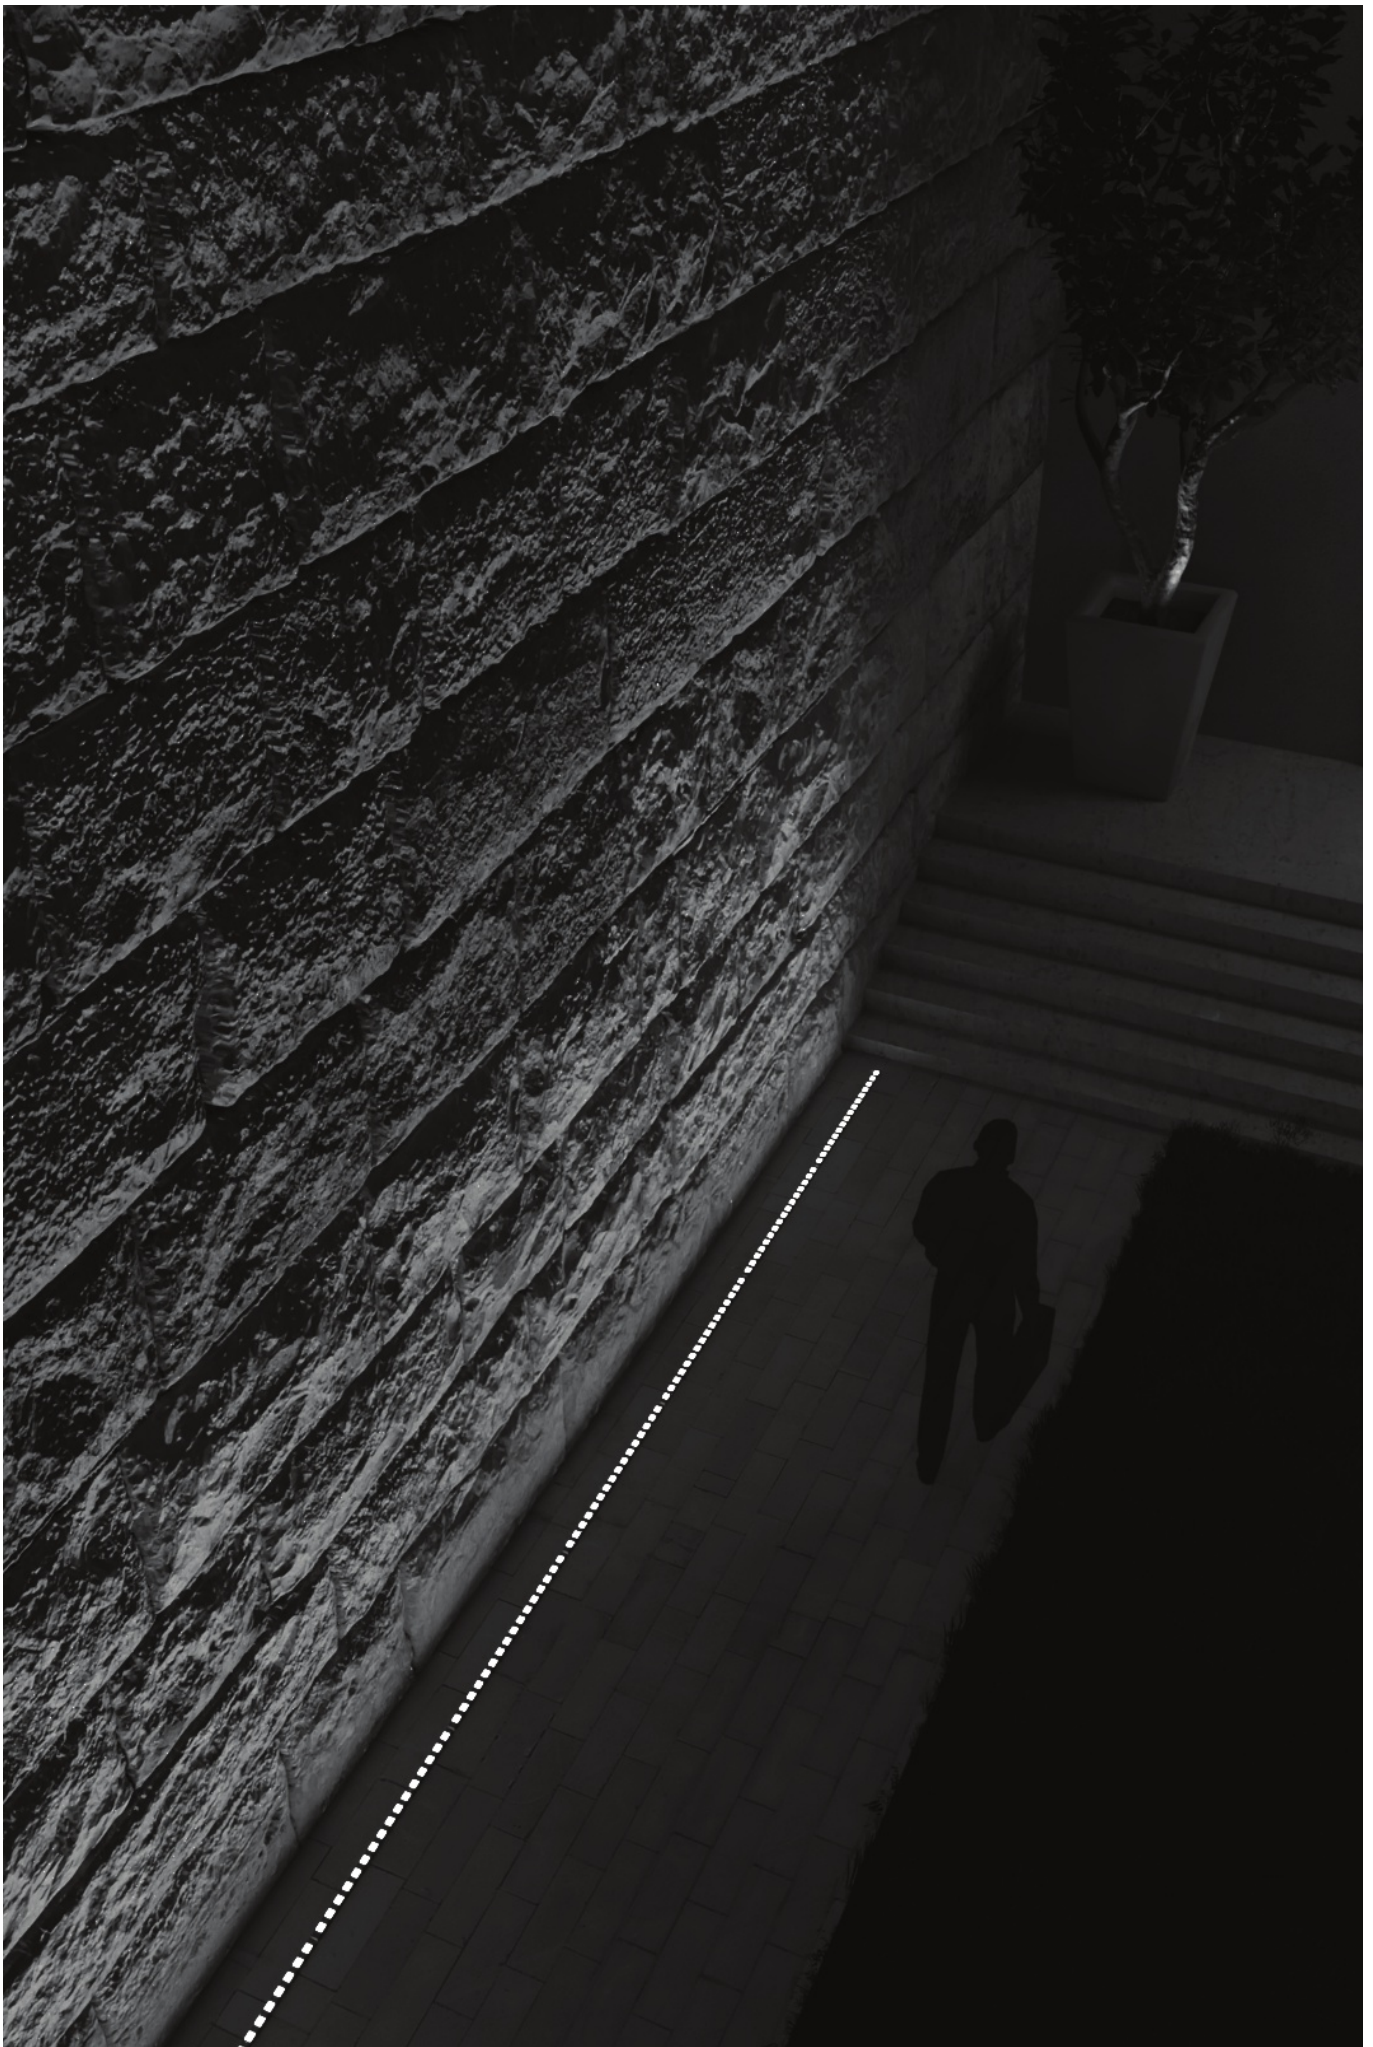

LIT-40100

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

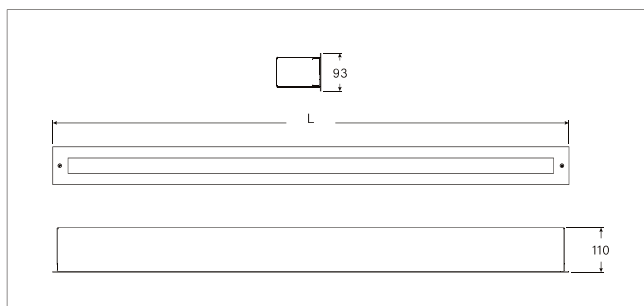

Standard input cable options (High lumen: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310825	1487 lm	1115 lm	65.2lm/w	17.1W	3000k	357mm
4311825	2974 lm	2230 lm	65.2lm/w	34.2W	3000k	657mm
4312825	4461 lm	3345 lm	65.2lm/w	51.3W	3000k	957mm
4313825	5948 lm	4460 lm	65.2lm/w	68.4W	3000k	1257mm
4310826	1487 lm	1115 lm	65.2lm/w	17.1W	4000k	357mm
4311826	2974 lm	2230 lm	65.2lm/w	34.2W	4000k	657mm
4312826	4461 lm	3345 lm	65.2lm/w	51.3W	4000k	957mm
4313826	5948 lm	4460 lm	65.2lm/w	68.4W	4000k	1257mm


In & Out input cable options (High lumen: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330825	1487 lm	1115 lm	65.2lm/w	17.1W	3000k	357mm
4331825	2974 lm	2230 lm	65.2lm/w	34.2W	3000k	657mm
4332825	4461 lm	3345 lm	65.2lm/w	51.3W	3000k	957mm
4333825	5948 lm	4460 lm	65.2lm/w	68.4W	3000k	1257mm
4330826	1487 lm	1115 lm	65.2lm/w	17.1W	4000k	357mm
4331826	2974 lm	2230 lm	65.2lm/w	34.2W	4000k	657mm
4332826	4461 lm	3345 lm	65.2lm/w	51.3W	4000k	957mm
4333826	5948 lm	4460 lm	65.2lm/w	68.4W	4000k	1257mm

LIT-40100

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

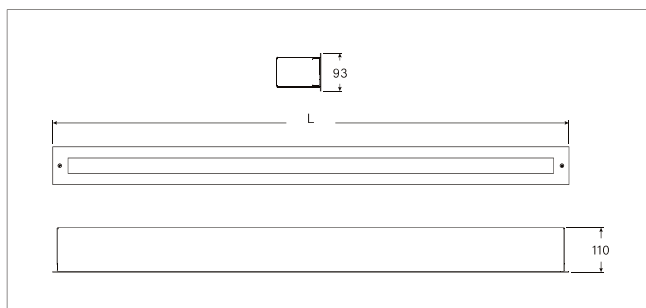

Standard input cable options (High lumen: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310525	1041 lm	781 lm	65.0lm/w	12.0W	3000k	357mm
4311525	2082 lm	1562 lm	65.0lm/w	24.0W	3000k	657mm
4312525	3123 lm	2343 lm	65.0lm/w	36.0W	3000k	957mm
4313525	4164 lm	3124 lm	65.0lm/w	48.0W	3000k	1257mm
4310526	1041 lm	781 lm	65.0lm/w	12.0W	4000k	357mm
4311526	2082 lm	1562 lm	65.0lm/w	24.0W	4000k	657mm
4312526	3123 lm	2343 lm	65.0lm/w	36.0W	4000k	957mm
4313526	4164 lm	3124 lm	65.0lm/w	48.0W	4000k	1257mm


In & Out input cable options (High lumen: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330525	1041 lm	781 lm	65.0lm/w	12.0W	3000k	357mm
4331525	2082 lm	1562 lm	65.0lm/w	24.0W	3000k	657mm
4332525	3123 lm	2343 lm	65.0lm/w	36.0W	3000k	957mm
4333525	4164 lm	3124 lm	65.0lm/w	48.0W	3000k	1257mm
4330526	1041 lm	781 lm	65.0lm/w	12.0W	4000k	357mm
4331526	2082 lm	1562 lm	65.0lm/w	24.0W	4000k	657mm
4332526	3123 lm	2343 lm	65.0lm/w	36.0W	4000k	957mm
4333526	4164 lm	3124 lm	65.0lm/w	48.0W	4000k	1257mm

LIT-40100

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 93 x 110mm 4.16 kg per 125.7 cm
Colors	Dark Grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

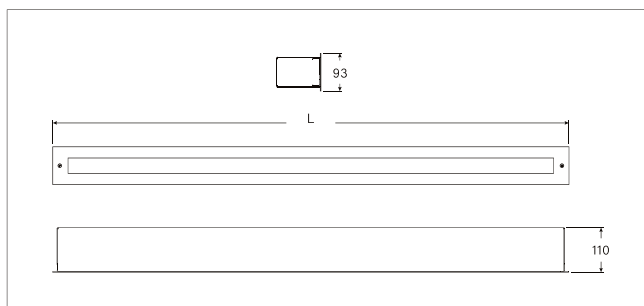


Standard input cable options (High lumen: 250mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310325	743 lm	557 lm	64.7lm/w	8.6W	3000k	357mm
4311325	1486 lm	1114 lm	64.7lm/w	17.2W	3000k	657mm
4312325	2229 lm	1671 lm	64.7lm/w	25.8W	3000k	957mm
4313325	2972 lm	2228 lm	64.7lm/w	34.4W	3000k	1257mm
4310326	743 lm	557 lm	64.7lm/w	8.6W	4000k	357mm
4311326	1486 lm	1114 lm	64.7lm/w	17.2W	4000k	657mm
4312326	2229 lm	1671 lm	64.7lm/w	25.8W	4000k	957mm
4313326	2972 lm	2228 lm	64.7lm/w	34.4W	4000k	1257mm

In & Out input cable options (High lumen: 250mA)


Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330325	743 lm	557 lm	64.7lm/w	8.6W	3000k	357mm
4331325	1486 lm	1114 lm	64.7lm/w	17.2W	3000k	657mm
4332325	2229 lm	1671 lm	64.7lm/w	25.8W	3000k	957mm
4333325	2972 lm	2228 lm	64.7lm/w	34.4W	3000k	1257mm
4330326	743 lm	557 lm	64.7lm/w	8.6W	4000k	357mm
4331326	1486 lm	1114 lm	64.7lm/w	17.2W	4000k	657mm
4332326	2229 lm	1671 lm	64.7lm/w	25.8W	4000k	957mm
4333326	2972 lm	2228 lm	64.7lm/w	34.4W	4000k	1257mm

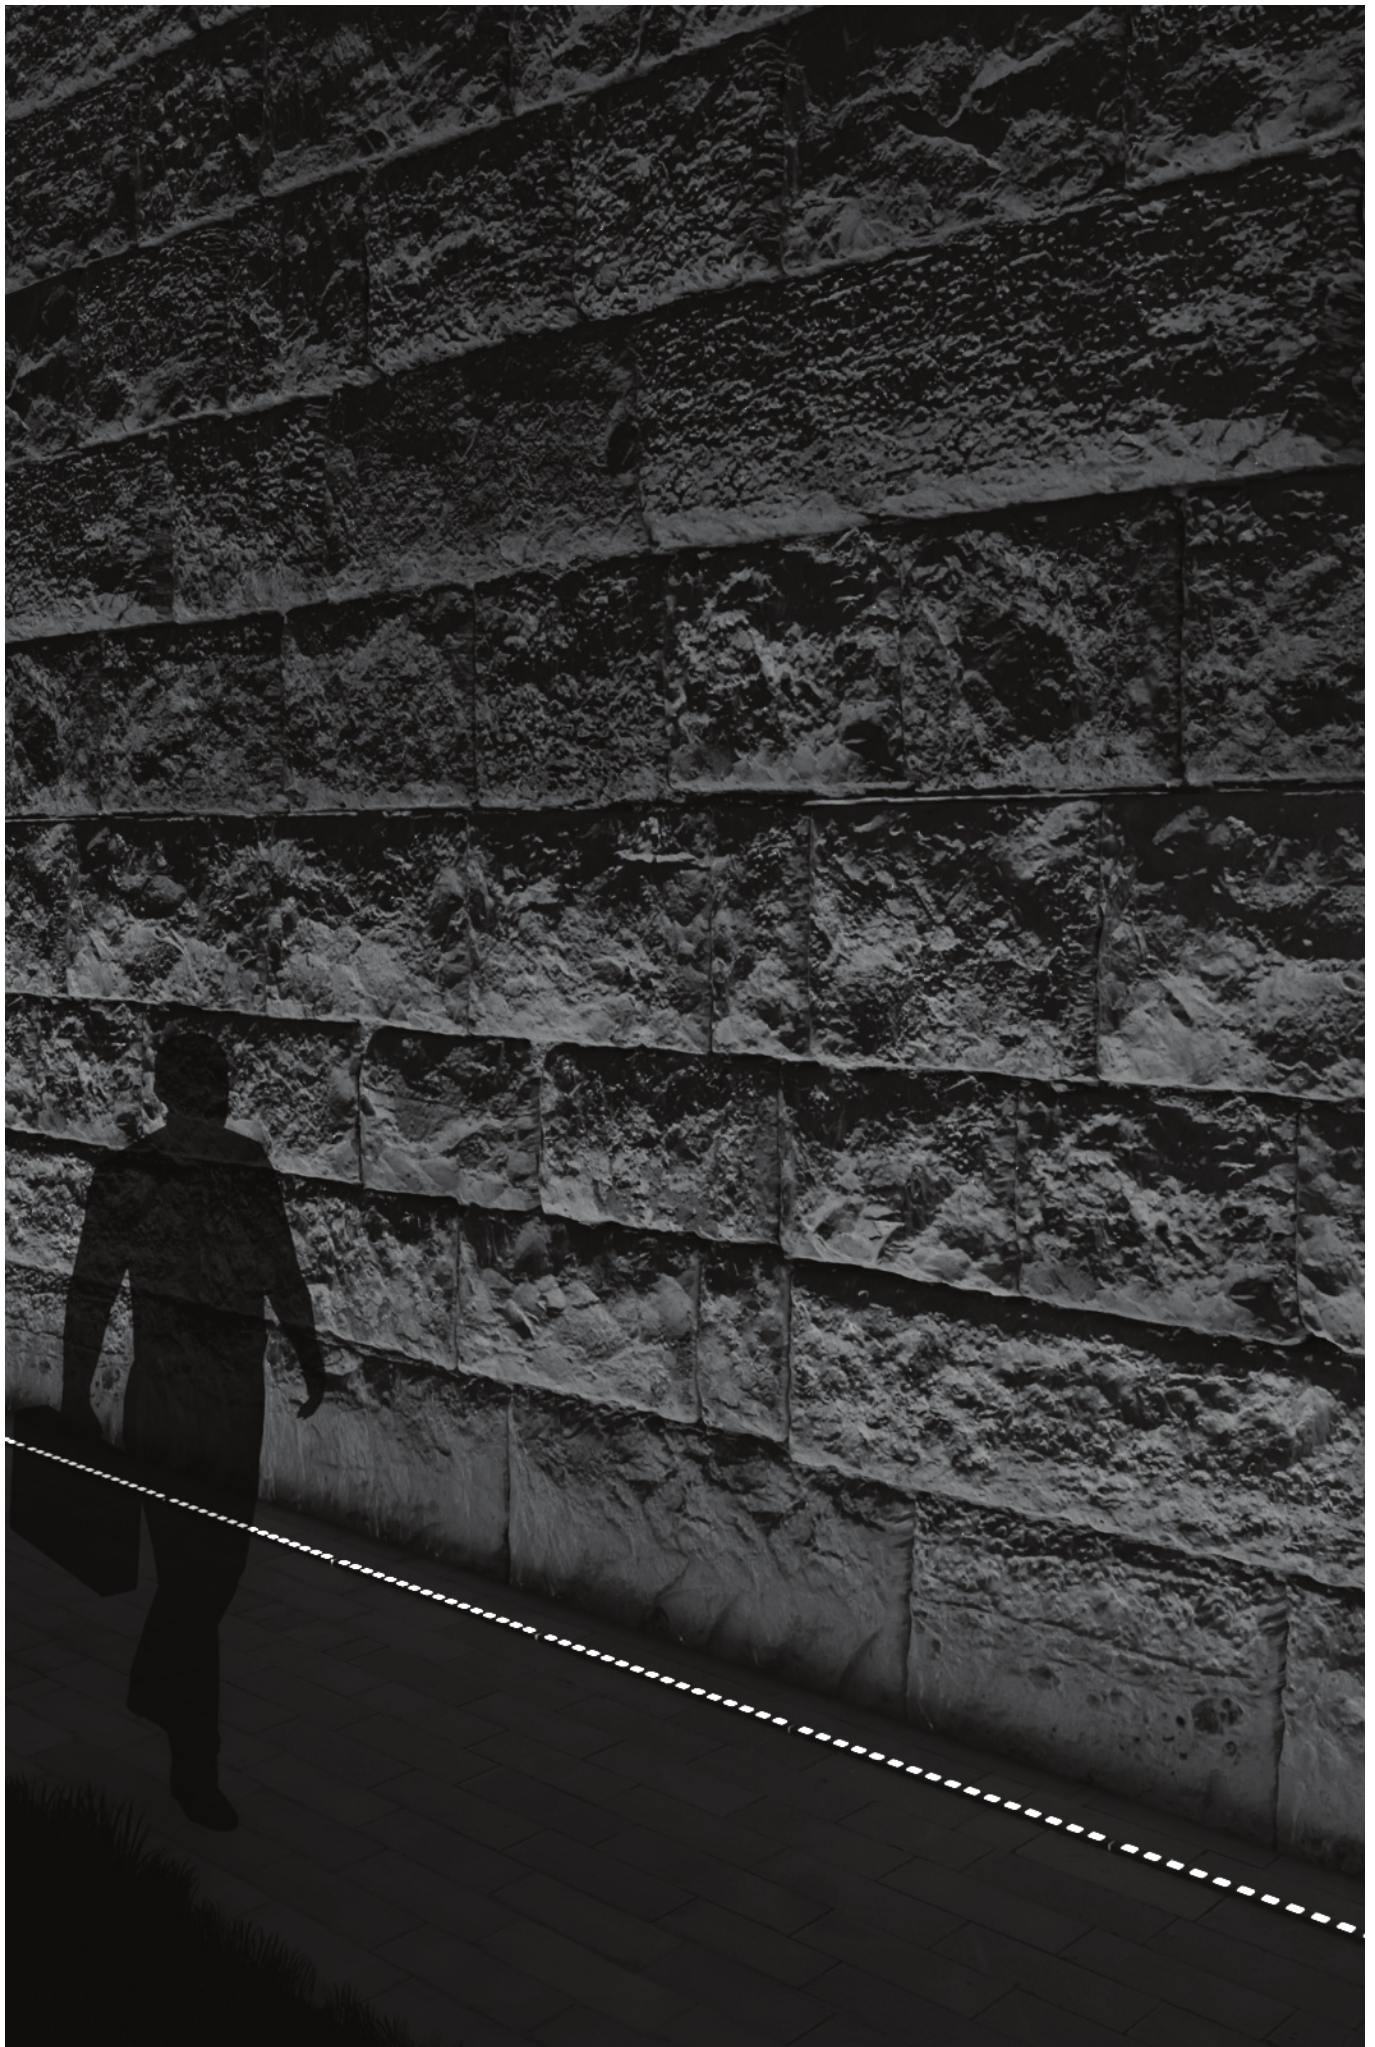

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

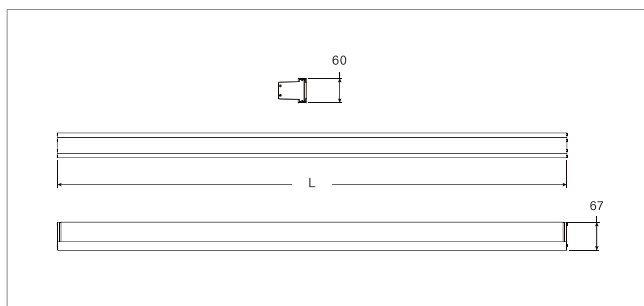

Standard input cable options (High efficiency: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320815	840 lm	720 lm	84.7lm/w	8.5W	3000k	318mm
4321815	1680 lm	1470 lm	84.7lm/w	17W	3000k	618mm
4322815	2520 lm	2160 lm	84.7lm/w	25.5W	3000k	918mm
4323815	3360 lm	2880 lm	84.7lm/w	34W	3000k	1218mm
4320816	840 lm	720 lm	84.7lm/w	8.5W	4000k	318mm
4321816	1680 lm	1470 lm	84.7lm/w	17W	4000k	618mm
4322816	2520 lm	2160 lm	84.7lm/w	25.5W	4000k	918mm
4323816	3360 lm	2880 lm	84.7lm/w	34W	4000k	1218mm


In & Out input cable options (High efficiency: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340815	840 lm	720 lm	84.7lm/w	8.5W	3000k	318mm
4341815	1680 lm	1470 lm	84.7lm/w	17W	3000k	618mm
4342815	2520 lm	2160 lm	84.7lm/w	25.5W	3000k	918mm
4343815	3360 lm	2880 lm	84.7lm/w	34W	3000k	1218mm
4340816	840 lm	720 lm	84.7lm/w	8.5W	4000k	318mm
4341816	1680 lm	1470 lm	84.7lm/w	17W	4000k	618mm
4342816	2520 lm	2160 lm	84.7lm/w	25.5W	4000k	918mm
4343816	3360 lm	2880 lm	84.7lm/w	34W	4000k	1218mm

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

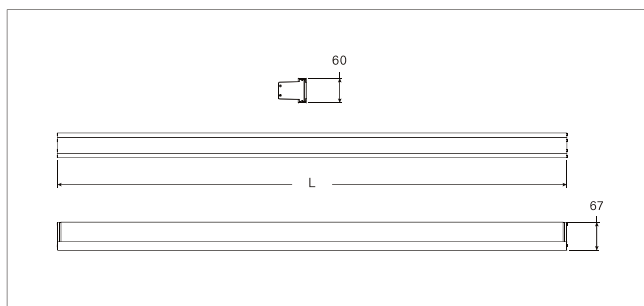

Standard input cable options (High efficiency: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320515	590 lm	505 lm	84.2lm/w	6W	3000k	318mm
4321515	1180 lm	1010 lm	84.2lm/w	12W	3000k	618mm
4322515	1770 lm	1515 lm	84.2lm/w	18W	3000k	918mm
4323515	2360 lm	2020 lm	84.2lm/w	24W	3000k	1218mm
4320516	590 lm	505 lm	84.2lm/w	6W	4000k	318mm
4321516	1180 lm	1010 lm	84.2lm/w	12W	4000k	618mm
4322516	1770 lm	1515 lm	84.2lm/w	18W	4000k	918mm
4323516	2360 lm	2020 lm	84.2lm/w	24W	4000k	1218mm


In & Out input cable options (High efficiency: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340515	590 lm	505 lm	84.2lm/w	6W	3000k	318mm
4341515	1180 lm	1010 lm	84.2lm/w	12W	3000k	618mm
4342515	1770 lm	1515 lm	84.2lm/w	18W	3000k	918mm
4343515	2360 lm	2020 lm	84.2lm/w	24W	3000k	1218mm
4340516	590 lm	505 lm	84.2lm/w	6W	4000k	318mm
4341516	1180 lm	1010 lm	84.2lm/w	12W	4000k	618mm
4342516	1770 lm	1515 lm	84.2lm/w	18W	4000k	918mm
4343516	2360 lm	2020 lm	84.2lm/w	24W	4000k	1218mm

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

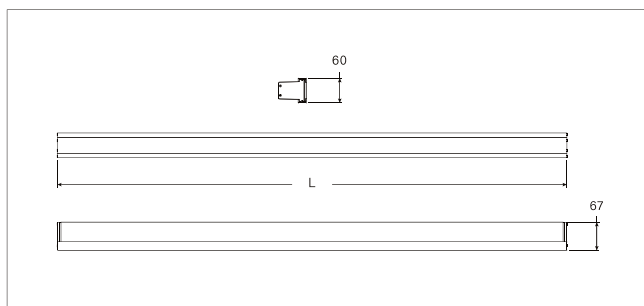


Standard input cable options (High efficiency: 250mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320315	420 lm	360 lm	84.2lm/w	4.3W	3000k	318mm
4321315	840 lm	720 lm	84.2lm/w	8.6W	3000k	618mm
4322315	1260 lm	1080 lm	84.2lm/w	12.9W	3000k	918mm
4323315	1680 lm	1440 lm	84.2lm/w	17.2W	3000k	1218mm
4320316	420 lm	360 lm	84.2lm/w	4.3W	4000k	318mm
4321316	840 lm	720 lm	84.2lm/w	8.6W	4000k	618mm
4322316	1260 lm	1080 lm	84.2lm/w	12.9W	4000k	918mm
4323316	1680 lm	1440 lm	84.2lm/w	17.2W	4000k	1218mm

In & Out input cable options (High efficiency: 250mA)


Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340315	420 lm	360 lm	84.2lm/w	4.3W	3000k	318mm
4341315	840 lm	720 lm	84.2lm/w	8.6W	3000k	618mm
4342315	1260 lm	1080 lm	84.2lm/w	12.9W	3000k	918mm
4343315	1680 lm	1440 lm	84.2lm/w	17.2W	3000k	1218mm
4340316	420 lm	360 lm	84.2lm/w	4.3W	4000k	318mm
4341316	840 lm	720 lm	84.2lm/w	8.6W	4000k	618mm
4342316	1260 lm	1080 lm	84.2lm/w	12.9W	4000k	918mm
4343316	1680 lm	1440 lm	84.2lm/w	17.2W	4000k	1218mm

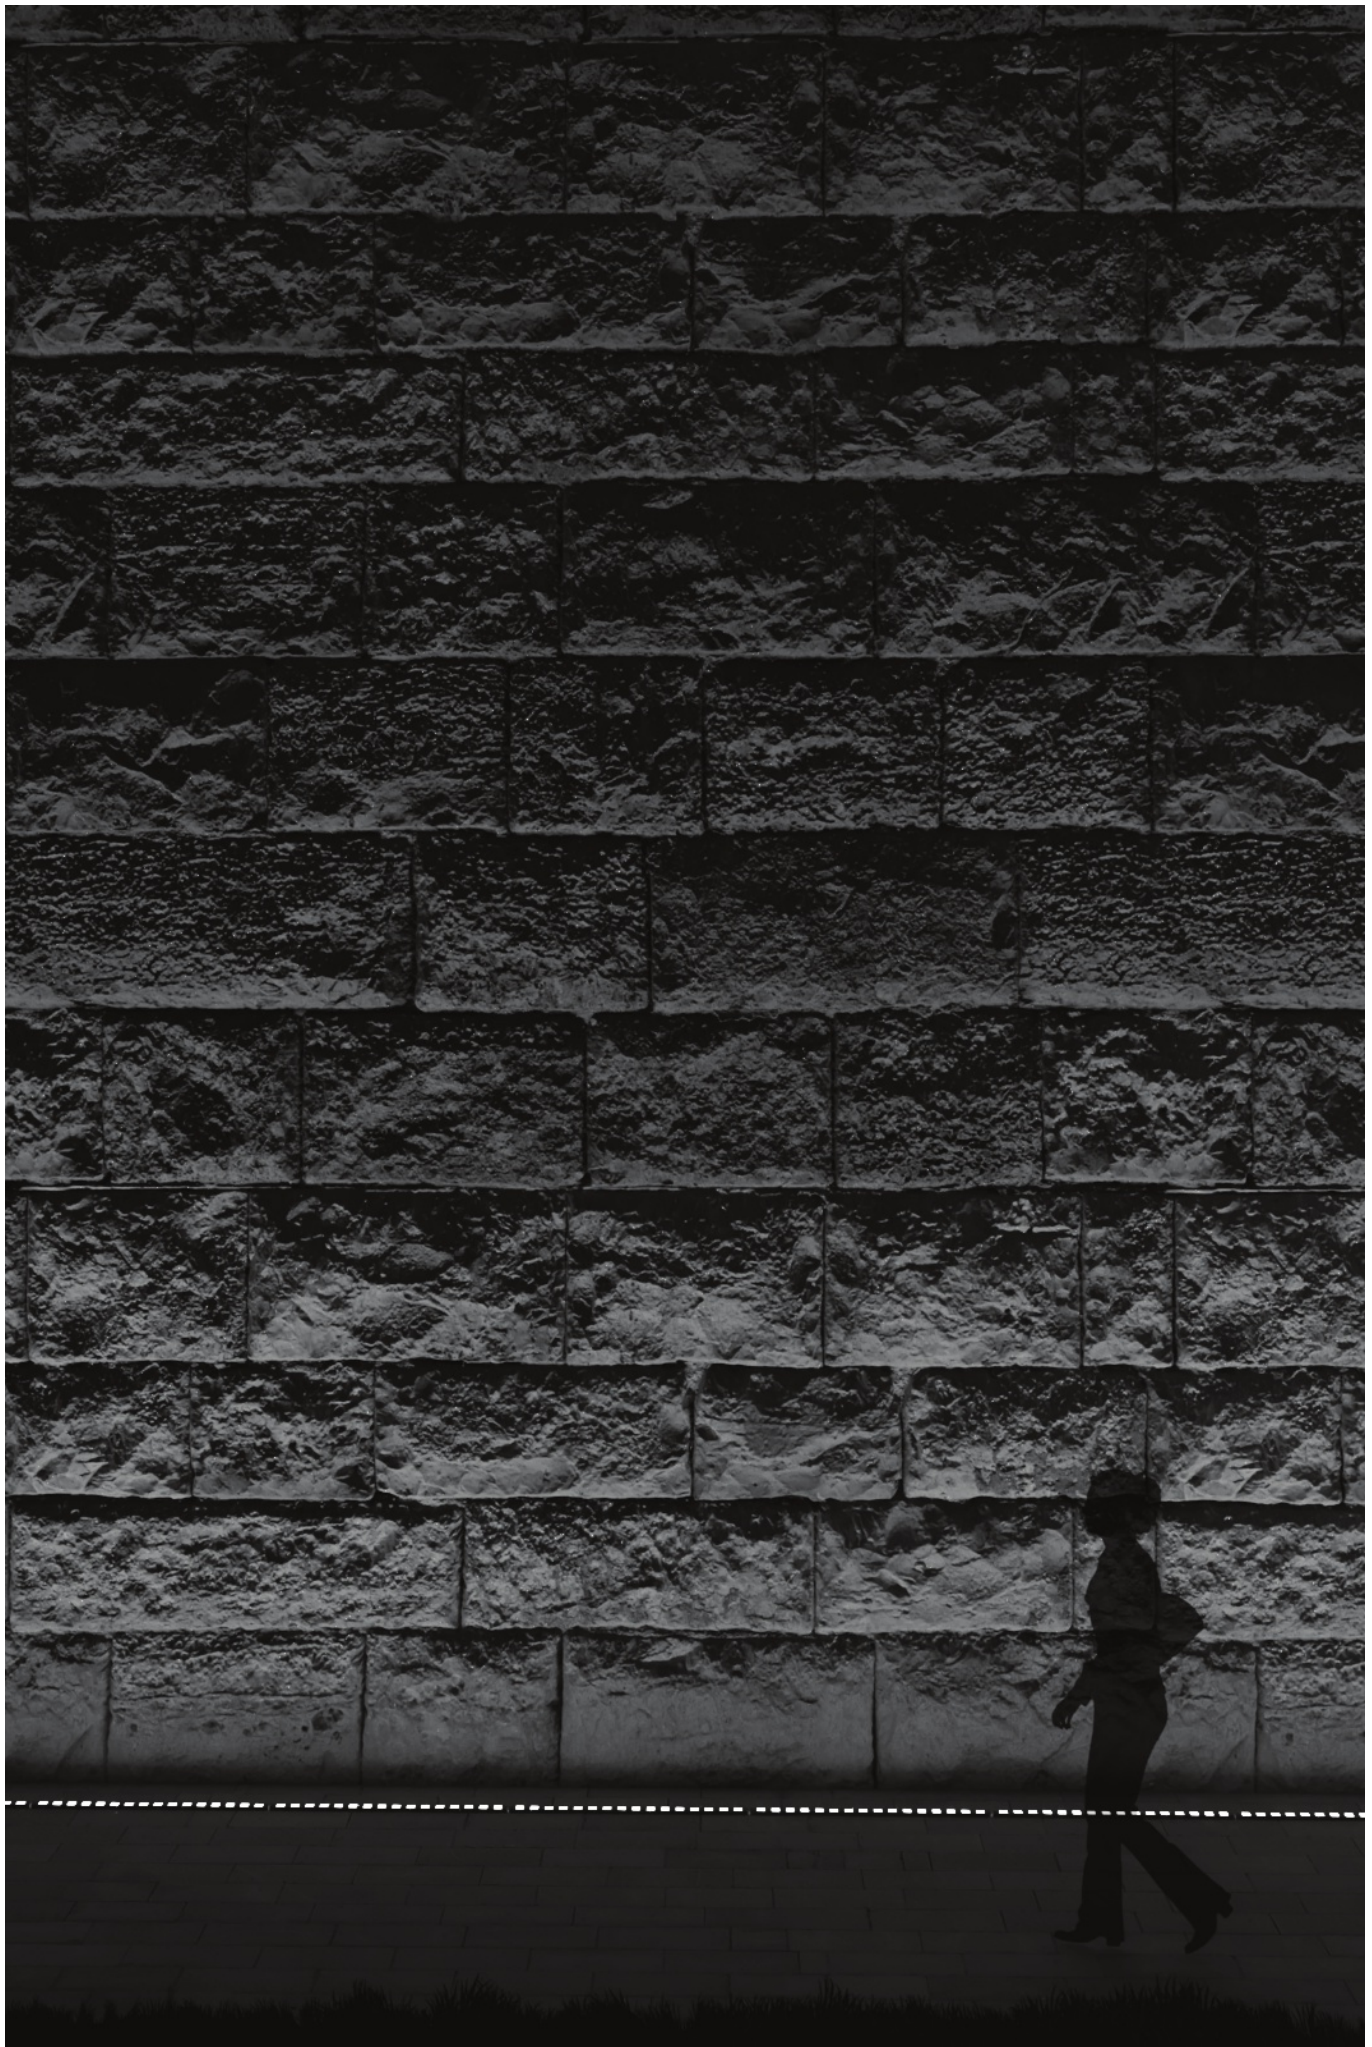

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

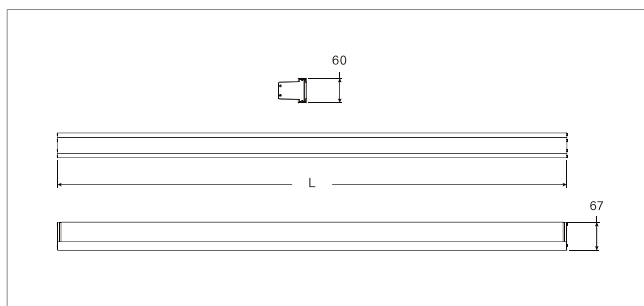

Standard input cable options (High lumen: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320825	1487 lm	1115 lm	65.2lm/w	17.1W	3000k	318mm
4321825	2974 lm	2230 lm	65.2lm/w	34.2W	3000k	618mm
4322825	4461 lm	3345 lm	65.2lm/w	51.3W	3000k	918mm
4323825	5948 lm	4460 lm	65.2lm/w	68.4W	3000k	1218mm
4320826	1487 lm	1115 lm	65.2lm/w	17.1W	4000k	318mm
4321826	2974 lm	2230 lm	65.2lm/w	34.2W	4000k	618mm
4322826	4461 lm	3345 lm	65.2lm/w	51.3W	4000k	918mm
4323826	5948 lm	4460 lm	65.2lm/w	68.4W	4000k	1218mm


In & Out input cable options (High lumen: 500mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340825	1487 lm	1115 lm	65.2lm/w	17.1W	3000k	318mm
4341825	2974 lm	2230 lm	65.2lm/w	34.2W	3000k	618mm
4342825	4461 lm	3345 lm	65.2lm/w	51.3W	3000k	918mm
4343825	5948 lm	4460 lm	65.2lm/w	68.4W	3000k	1218mm
4340826	1487 lm	1115 lm	65.2lm/w	17.1W	4000k	318mm
4341826	2974 lm	2230 lm	65.2lm/w	34.2W	4000k	618mm
4342826	4461 lm	3345 lm	65.2lm/w	51.3W	4000k	918mm
4343826	5948 lm	4460 lm	65.2lm/w	68.4W	4000k	1218mm

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

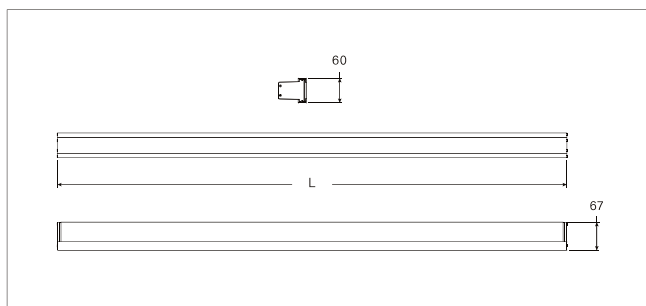

Standard input cable options (High lumen: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320525	1041 lm	781 lm	65.0lm/w	12.0W	3000k	318mm
4321525	2082 lm	1562 lm	65.0lm/w	24.0W	3000k	618mm
4322525	3123 lm	2343 lm	65.0lm/w	36.0W	3000k	918mm
4323525	4164 lm	3124 lm	65.0lm/w	48.0W	3000k	1218mm
4320526	1041 lm	781 lm	65.0lm/w	12.0W	4000k	318mm
4321526	2082 lm	1562 lm	65.0lm/w	24.0W	4000k	618mm
4322526	3123 lm	2343 lm	65.0lm/w	36.0W	4000k	918mm
4323526	4164 lm	3124 lm	65.0lm/w	48.0W	4000k	1218mm


In & Out input cable options (High lumen: 350mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340525	1041 lm	781 lm	65.0lm/w	12.0W	3000k	318mm
4341525	2082 lm	1562 lm	65.0lm/w	24.0W	3000k	618mm
4342525	3123 lm	2343 lm	65.0lm/w	36.0W	3000k	918mm
4343525	4164 lm	3124 lm	65.0lm/w	48.0W	3000k	1218mm
4340526	1041 lm	781 lm	65.0lm/w	12.0W	4000k	318mm
4341526	2082 lm	1562 lm	65.0lm/w	24.0W	4000k	618mm
4342526	3123 lm	2343 lm	65.0lm/w	36.0W	4000k	918mm
4343526	4164 lm	3124 lm	65.0lm/w	48.0W	4000k	1218mm

LIT-40100

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs at 45°C
Body material	Extruded Aluminium
Dimensions & Weight	L x 60 x 67mm 4.16 kg per 125.7 cm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

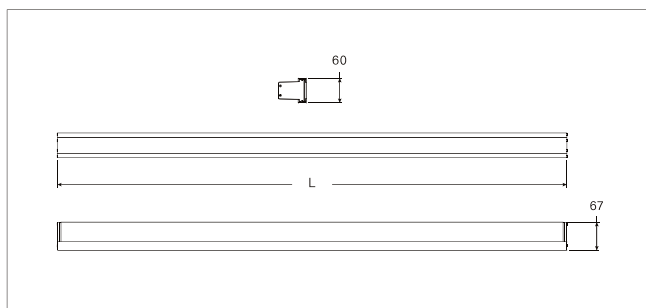

Standard input cable options (High lumen: 250mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320325	743 lm	557 lm	64.7lm/w	8.6W	3000k	318mm
4321325	1486 lm	1114 lm	64.7lm/w	17.2W	3000k	618mm
4322325	2229 lm	1671 lm	64.7lm/w	25.8W	3000k	918mm
4323325	2972 lm	2228 lm	64.7lm/w	34.4W	3000k	1218mm
4320326	743 lm	557 lm	64.7lm/w	8.6W	4000k	318mm
4321326	1486 lm	1114 lm	64.7lm/w	17.2W	4000k	618mm
4322326	2229 lm	1671 lm	64.7lm/w	25.8W	4000k	918mm
4323326	2972 lm	2228 lm	64.7lm/w	34.4W	4000k	1218mm

In & Out input cable options (High lumen: 250mA)

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340325	743 lm	557 lm	64.7lm/w	8.6W	3000k	318mm
4341325	1486 lm	1114 lm	64.7lm/w	17.2W	3000k	618mm
4342325	2229 lm	1671 lm	64.7lm/w	25.8W	3000k	918mm
4343325	2972 lm	2228 lm	64.7lm/w	34.4W	3000k	1218mm
4340326	743 lm	557 lm	64.7lm/w	8.6W	4000k	318mm
4341326	1486 lm	1114 lm	64.7lm/w	17.2W	4000k	618mm
4342326	2229 lm	1671 lm	64.7lm/w	25.8W	4000k	918mm
4343326	2972 lm	2228 lm	64.7lm/w	34.4W	4000k	1218mm

