



LIT-SYS L55D

Suspended linear system with a deep lighting source. A subtle lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

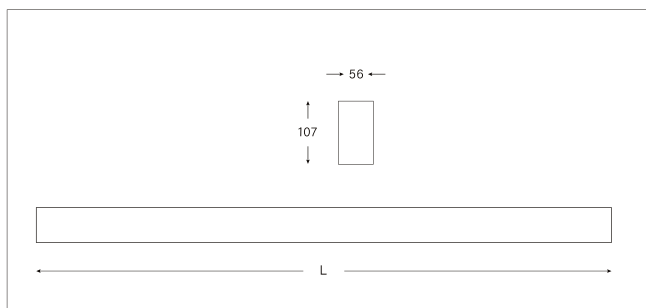


LIT-SYS L55D | Linear Systems | Suspended



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 107mm W 56mm 3.23 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Suspended mounted

Customizable on request



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
741121X	1359 lm	729 lm	93.5lm/w	7.8W	3000k	570mm
741122X	1894 lm	1015 lm	89.0lm/w	11.4W	3000k	570mm
741221X	2039 lm	1094 lm	93.5lm/w	11.7W	3000k	850mm
741222X	2840 lm	1522 lm	89.0lm/w	17.1W	3000k	850mm
741321X	2719 lm	1459 lm	93.5lm/w	15.6W	3000k	1130mm
741322X	3787 lm	2030 lm	89.0lm/w	22.8W	3000k	1130mm
741421X	3398 lm	1823 lm	93.5lm/w	19.5W	3000k	1410mm
741422X	4734 lm	2538 lm	89.0lm/w	28.5W	3000k	1410mm
741121Y	1429 lm	767 lm	98.3lm/w	7.8W	4000k	570mm
741122Y	1991 lm	1068 lm	93.7lm/w	11.4W	4000k	570mm
741221Y	2144 lm	1150 lm	98.3lm/w	11.7W	4000k	850mm
741222Y	2987 lm	1602 lm	93.7lm/w	17.1W	4000k	850mm
741321Y	2859 lm	1534 lm	98.3lm/w	15.6W	4000k	1130mm
741322Y	3982 lm	2136 lm	93.7lm/w	22.8W	4000k	1130mm
741421Y	3573 lm	1917 lm	98.3lm/w	19.5W	4000k	1410mm
741422Y	4978 lm	2671 lm	93.7lm/w	28.5W	4000k	1410mm

Code	White	Grey	Black
X	1	4	7
Y	2	5	8




Related Products:



220

LIT-SYS L55D

Ceiling-mounted linear system with a deep lighting source. A subtle lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

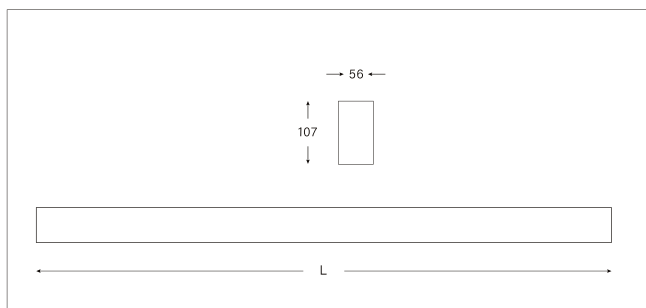


LIT-SYS L55D | Linear Systems | Ceiling Mounted



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 107 W 56mm 3.23 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Ceiling mounted

Customizable on request



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
740121X	1359 lm	729 lm	93.5lm/w	7.8W	3000k	570mm
740122X	1894 lm	1015 lm	89.0lm/w	11.4W	3000k	570mm
740221X	2039 lm	1094 lm	93.5lm/w	11.7W	3000k	850mm
740222X	2840 lm	1522 lm	89.0lm/w	17.1W	3000k	850mm
740321X	2719 lm	1459 lm	93.5lm/w	15.6W	3000k	1130mm
740322X	3787 lm	2030 lm	89.0lm/w	22.8W	3000k	1130mm
740421X	3398 lm	1823 lm	93.5lm/w	19.5W	3000k	1410mm
740422X	4734 lm	2538 lm	89.0lm/w	28.5W	3000k	1410mm
740121Y	1429 lm	767 lm	98.3lm/w	7.8W	4000k	570mm
740122Y	1991 lm	1068 lm	93.7lm/w	11.4W	4000k	570mm
740221Y	2144 lm	1150 lm	98.3lm/w	11.7W	4000k	850mm
740222Y	2987 lm	1602 lm	93.7lm/w	17.1W	4000k	850mm
740321Y	2859 lm	1534 lm	98.3lm/w	15.6W	4000k	1130mm
740322Y	3982 lm	2136 lm	93.7lm/w	22.8W	4000k	1130mm
740421Y	3573 lm	1917 lm	98.3lm/w	19.5W	4000k	1410mm
740422Y	4978 lm	2671 lm	93.7lm/w	28.5W	4000k	1410mm

Related Products:

LIT-6140





220

Code	White	Grey	Black
X	1	4	7
Y	2	5	8

LIT-SYS L55D

Trimless recessed linear system with a deep lighting source. A subtle lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

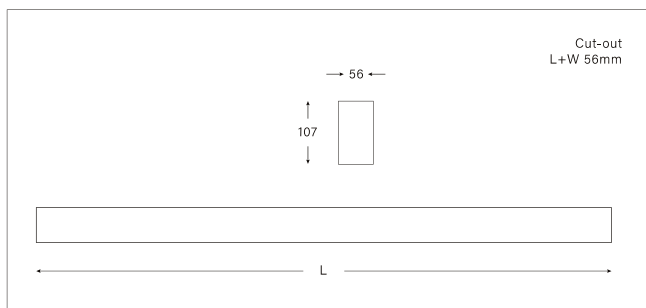


LIT-SYS L55D | Linear Systems | Recessed



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 107 W 56mm 3.23 kg per 113cm
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic driver
Mounting	Recessed mounted

Customizable on request



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
742121X	1359 lm	729 lm	93.5lm/w	7.8W	3000k	570mm
742122X	1894 lm	1015 lm	89.0lm/w	11.4W	3000k	570mm
742221X	2039 lm	1094 lm	93.5lm/w	11.7W	3000k	850mm
742222X	2840 lm	1522 lm	89.0lm/w	17.1W	3000k	850mm
742321X	2719 lm	1459 lm	93.5lm/w	15.6W	3000k	1130mm
742322X	3787 lm	2030 lm	89.0lm/w	22.8W	3000k	1130mm
742421X	3398 lm	1823 lm	93.5lm/w	19.5W	3000k	1410mm
742422X	4734 lm	2538 lm	89.0lm/w	28.5W	3000k	1410mm
742121Y	1429 lm	767 lm	98.3lm/w	7.8W	4000k	570mm
742122Y	1991 lm	1068 lm	93.7lm/w	11.4W	4000k	570mm
742221Y	2144 lm	1150 lm	98.3lm/w	11.7W	4000k	850mm
742222Y	2987 lm	1602 lm	93.7lm/w	17.1W	4000k	850mm
742321Y	2859 lm	1534 lm	98.3lm/w	15.6W	4000k	1130mm
742322Y	3982 lm	2136 lm	93.7lm/w	22.8W	4000k	1130mm
742421Y	3573 lm	1917 lm	98.3lm/w	19.5W	4000k	1410mm
742422Y	4978 lm	2671 lm	93.7lm/w	28.5W	4000k	1410mm

Code	White	Grey	Black
X	1	4	7
Y	2	5	8

Related Products:



220

