

LIT-40100

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Recessed



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ Co-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs
Body material	Extruded Aluminium
Dimension	L x 93 x 110mm
Colors	Dark greyt
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Recessed mounted

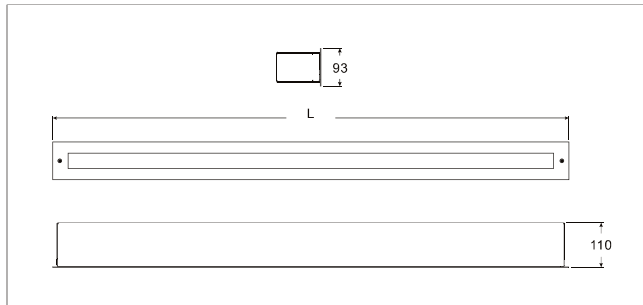

Standard input cable options

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4310305	1547 lm	1160 lm	120.8lm/w	9.6W	3000k	357mm
4311305	3094 lm	2320 lm	120.8lm/w	19.2W	3000k	657mm
4312305	4641 lm	3480 lm	120.8lm/w	28.8W	3000k	957mm
4313305	6188 lm	4640 lm	120.8lm/w	38.4W	3000k	1257mm
4310306	1547 lm	1160 lm	120.8lm/w	9.6W	4000k	357mm
4311306	3094 lm	2320 lm	120.8lm/w	19.2W	4000k	657mm
4312306	4641 lm	3480 lm	120.8lm/w	28.8W	4000k	957mm
4313306	6188 lm	4640 lm	120.8lm/w	38.4W	4000k	1257mm

In & Out input cable options

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4330305	1547 lm	1160 lm	120.8lm/w	9.6W	3000k	357mm
4331305	3094 lm	2320 lm	120.8lm/w	19.2W	3000k	657mm
4332305	4641 lm	3480 lm	120.8lm/w	28.8W	3000k	957mm
4333305	6188 lm	4640 lm	120.8lm/w	38.4W	3000k	1257mm
4330306	1547 lm	1160 lm	120.8lm/w	9.6W	4000k	357mm
4331306	3094 lm	2320 lm	120.8lm/w	19.2W	4000k	657mm
4332306	4641 lm	3480 lm	120.8lm/w	28.8W	4000k	957mm
4333306	6188 lm	4640 lm	120.8lm/w	38.4W	4000k	1257mm

IP66 surface-mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. Highly durable, offering a low glare continuous grazing effect.


LIT-40100 | Outdoor Linear Lighting | Surface



H(m)	Diameter(m)	(lx)
1.0	0.37	14433
2.0	0.73	3608
3.0	1.10	1604
4.0	1.47	902
5.0	1.83	577

■ C0-C180

Lumen, maintenance & failure rate	L70/B50 >54,000 hrs
Body material	Extruded Aluminium
Dimension	L x 60 x 67mm
Colors	Dark grey
Diffuser	Clear glass
Power supply	Electronic Driver
Reflector	Optical lens 15°
Mounting	Surface mounted

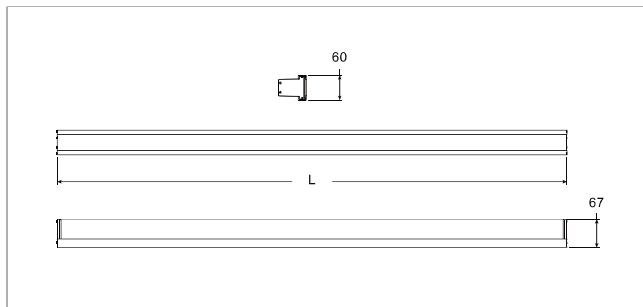

Standard input cable options

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4320305	1547 lm	1160 lm	120.8lm/w	9.6W	3000k	318mm
4321305	3094 lm	2320 lm	120.8lm/w	19.2W	3000k	618mm
4322305	4641 lm	3480 lm	120.8lm/w	28.8W	3000k	918mm
4323305	6188 lm	4640 lm	120.8lm/w	38.4W	3000k	1218mm
4320306	1547 lm	1160 lm	120.8lm/w	9.6W	4000k	318mm
4321306	3094 lm	2320 lm	120.8lm/w	19.2W	4000k	618mm
4322306	4641 lm	3480 lm	120.8lm/w	28.8W	4000k	918mm
4323306	6188 lm	4640 lm	120.8lm/w	38.4W	4000k	1218mm

In & Out input cable options

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Length
4340305	1547 lm	1160 lm	120.8lm/w	9.6W	3000k	318mm
4341305	3094 lm	2320 lm	120.8lm/w	19.2W	3000k	618mm
4342305	4641 lm	3480 lm	120.8lm/w	28.8W	3000k	918mm
4343305	6188 lm	4640 lm	120.8lm/w	38.4W	3000k	1218mm
4340306	1547 lm	1160 lm	120.8lm/w	9.6W	4000k	318mm
4341306	3094 lm	2320 lm	120.8lm/w	19.2W	4000k	618mm
4342306	4641 lm	3480 lm	120.8lm/w	28.8W	4000k	918mm
4343306	6188 lm	4640 lm	120.8lm/w	38.4W	4000k	1218mm