
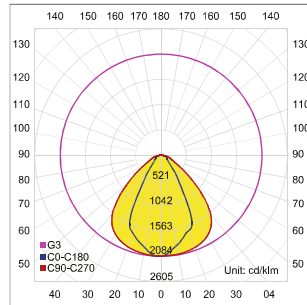



LIT-7100

Linear batten luminaire with a customizable optical diffuser that can be connected seamlessly in a continuous row. Surface-mounted or suspended, quick and easy to install providing a flexible solution for several applications.

LIT-7100 | Industrial Luminaires | Lens



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs
Body material	White painted steel sheet
Dimension	580 x 80 x 60mm / 1140 x 80 x 60mm
Colors	White
Diffuser	Optical lens
Power supply	Electronic Driver



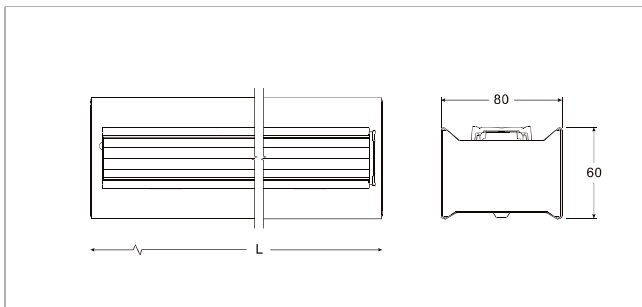


Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
7211451	2430 lm	1880 lm	117.5lm/w	16W	3000k	580mm
7211452	2560 lm	1980 lm	123.7lm/w	16W	4000k	580mm
7213451	4860 lm	3760 lm	117.5lm/w	32W	3000k	1140mm
7213452	5120 lm	3960 lm	123.7lm/w	32W	4000k	1140mm

LIT-7100

Linear batten luminaire with a round opal diffuser that can be connected in a continuous row for a uniform lighting distribution. Surface-mounted or suspended, quick and easy to install providing a flexible solution for several applications.

LIT-7100 | Industrial Luminaires | Opal

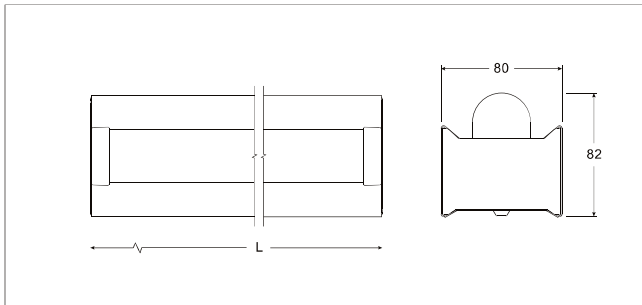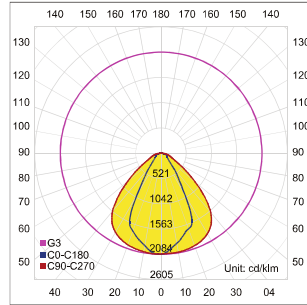

Lumen, maintenance & failure rate	L80/F10 >72,000 hrs
Body material	White painted steel sheet
Dimension	580 x 80 x 82mm / 1140 x 80 x 82mm
Colors	White
Diffuser	Opal
Power supply	Electronic Driver

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
7221451	2430 lm	1590 lm	99.3lm/w	16W	3000k	580mm
7221452	2560 lm	1675 lm	104.6lm/w	16W	4000k	580mm
7223451	4860 lm	3180 lm	99.3lm/w	32W	3000k	1140mm
7223452	5120 lm	3350 lm	104.6lm/w	32W	4000k	1140mm