
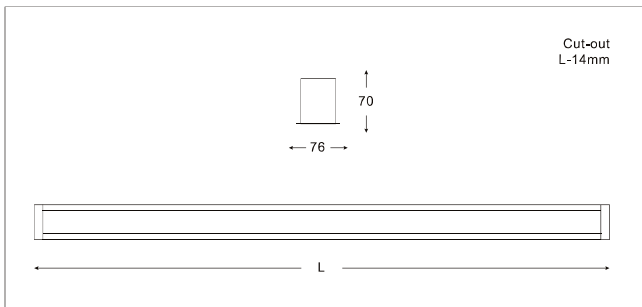
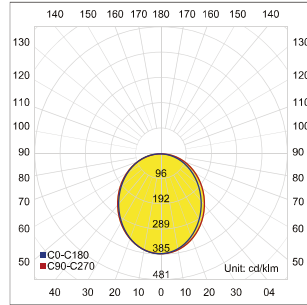



# LIT-SYS L55R

Recessed linear system with trim. A modern lighting solution for architectural spaces. Used continuously-mounted or as a stand-alone luminaire, it can be installed to create different geometric shapes.

## LIT-SYS L55R | Linear Systems | Recessed



Lumen, maintenance & failure rate	L80/F10 >72,000 hrs
Body material	Aluminum
Dimension	H 70mm W 76mm (Cutout L -14mm)
Colors	Check colors index
Diffuser	Opal
Power supply	Electronic Driver
Mounting	Recessed mounting

**Customizable on request**

Dimmable

Custom length

Corner connection

\*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
737125X	1380 lm	870 lm	111.5lm/w	7.8W	3000k	590mm
737121X	1930 lm	1215 lm	106.5lm/w	11.4W	3000k	590mm
737225X	2070 lm	1305 lm	111.5lm/w	11.7W	3000k	870mm
737221X	2895 lm	1825 lm	106.7lm/w	17.1W	3000k	870mm
737325X	2760 lm	1740 lm	111.5lm/w	15.6W	3000k	1150mm
737321X	3860 lm	2435 lm	106.7lm/w	22.8W	3000k	1150mm
737425X	3450 lm	2175 lm	111.5lm/w	19.5W	3000k	1430mm
737423X	4825 lm	3045 lm	106.8lm/w	28.5W	3000k	1430mm
737125Y	1450 lm	915 lm	117.3lm/w	7.8W	4000k	590mm
737121Y	2030 lm	1280 lm	112.2lm/w	11.4W	4000k	590mm
737225Y	2175 lm	1370 lm	117.1lm/w	11.7W	4000k	870mm
737221Y	3040 lm	1915 lm	112.0lm/w	17.1W	4000k	870mm
737325Y	2900 lm	1830 lm	117.3lm/w	15.6W	4000k	1150mm
737321Y	4060 lm	2560 lm	112.2lm/w	22.8W	4000k	1150mm
737425Y	3625 lm	2285 lm	117.1lm/w	19.5W	4000k	1430mm
737423Y	5070 lm	3200 lm	112.2lm/w	28.5W	4000k	1430mm

Code	White	Grey	Black
X	3	1	5
Y	4	2	6

