
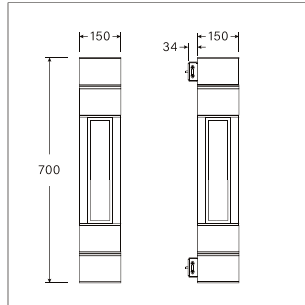
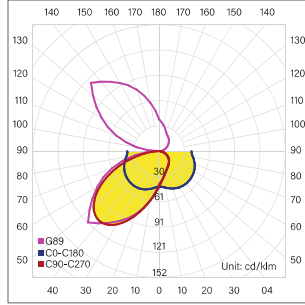


LIT-28700

Wall-mounted luminaire features a sleek tall box design with a frosted glass diffuser, blending seamlessly into any outdoor space. With an IP65 rating, built to endure all weather conditions while providing a perfect lighting solution.

LIT-28700 | Wall lamps | Wall appliques




Lumen, maintenance & failure rate	L90/B10 >70,000 hrs at 45°C
Body material	Aluminium body
Dimensions & Weight	L 150 x W 150 x H 700mm 10 kg
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Reflector	Optical lens

Two directions with opal

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
3714244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	13°
3714245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	13°
3726244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	38°
3726245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	38°
3738244	8553 lm	4319 lm	82.3lm/w	3x17.5W	3000k	60°
3738245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	60°




Related Products:

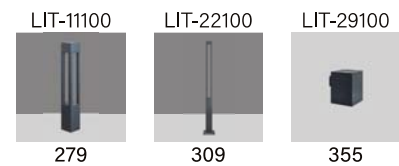

LIT-28700

Wall-mounted luminaire features a sleek tall box geometric design with a frosted glass diffuser, blending seamlessly into any outdoor space. With an IP65 rating, built to endure all weather conditions while providing a perfect lighting solution.

LIT-28700 | Wall lamps | Wall appliques

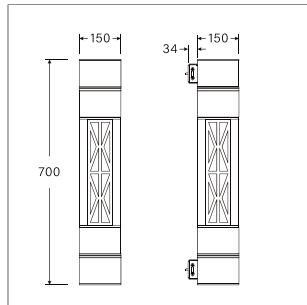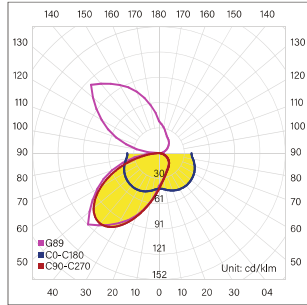

Lumen, maintenance & failure rate	L90/B10 >70,000 hrs at 45°C
Body material	Aluminium body
Dimensions & Weight	L 150 x W 150 x H 700mm 10.2 kg
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Reflector	Optical lens

Customizable on request


Customizable Pattern

*Longer lead time

Two directions with pattern

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
3715244	8100 lm	4334 lm	82.3lm/w	3x17.5W	3000k	13°
3715245	8553 lm	4556 lm	86.5lm/w	3x17.5W	4000k	13°
3727244	8100 lm	4334 lm	82.3lm/w	3x17.5W	3000k	38°
3727245	8553 lm	4556 lm	86.5lm/w	3x17.5W	4000k	38°
3739244	8553 lm	4334 lm	82.3lm/w	3x17.5W	3000k	60°
3739245	8553 lm	4556 lm	86.5lm/w	3x17.5W	4000k	60°




Related Products:

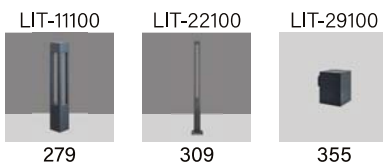

LIT-28700

Wall-mounted luminaire features a sleek tall box design with a frosted glass diffuser, blending seamlessly into any outdoor space. With an IP65 rating, built to endure all weather conditions while providing a perfect lighting solution.

LIT-28700 | Wall lamps | Wall appliques

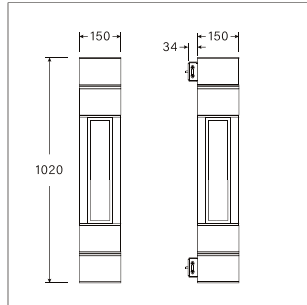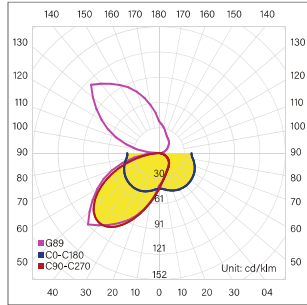


Lumen, maintenance & failure rate	L90/B10 >70,000 hrs at 45°C
Body material	Aluminium body
Dimensions & Weight	L 150 x W 150 x H 1020mm 13.38 kg
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Reflector	Optical lens

Two directions with opal

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
3718244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	13°
3718245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	13°
3730244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	38°
3730245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	38°
3742244	8553 lm	4319 lm	82.3lm/w	3x17.5W	3000k	60°
3742245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	60°




Related Products:

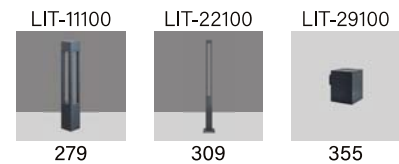

LIT-28700

Wall-mounted luminaire features a sleek tall box geometric design with a frosted glass diffuser, blending seamlessly into any outdoor space. With an IP65 rating, built to endure all weather conditions while providing a perfect lighting solution.

LIT-28700 | Wall lamps | Wall appliques

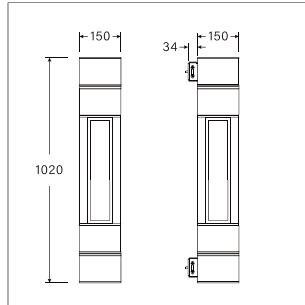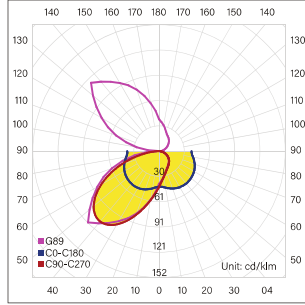

Lumen, maintenance & failure rate	L90/B10 >70,000 hrs at 45°C
Body material	Aluminium body
Dimensions & Weight	L 150 x W 150 x H 1020mm 13.63 kg
Colors	Dark grey
Diffuser	Opal
Power supply	Electronic driver
Reflector	Optical lens

Customizable on request

Customizable Pattern

*Longer lead time

Two directions with pattern

Code	LED lumen	Luminaire lumen	Efficiency	LED wattage	Color temperature	Beam angle
3719244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	13°
3719245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	13°
3731244	8100 lm	4319 lm	82.3lm/w	3x17.5W	3000k	38°
3731245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	38°
3743244	8553 lm	4319 lm	82.3lm/w	3x17.5W	3000k	60°
3743245	8553 lm	4541 lm	86.5lm/w	3x17.5W	4000k	60°

Related Products:

