
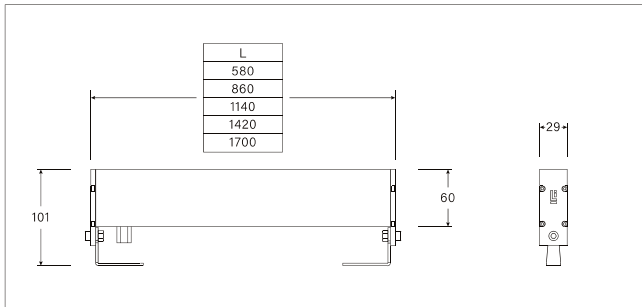


# LIT-40200

IP67 surface mounted frosted linear lighting for guidance lighting made of tough aluminum casing, and opal diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.

## LIT-40200 | Outdoor Linear Lighting | Surface

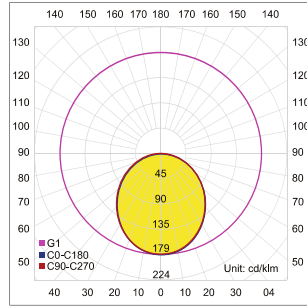

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C        |
| Body material                     | Extruded Aluminium                    |
| Dimensions & Weight               | L x 101 x 29mm     1.67 kg per 120 cm |
| Colors                            | Dark grey                             |
| Diffuser                          | Opal                                  |
| Power supply                      | Electronic Driver                     |
| Reflector                         | N/A                                   |

### Related Products:




### Opal version:

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5440315 | 1322 lm   | 358 lm          | 43.7lm/w   | 8.2W        | 3000k             | 580mm  |
| 5440316 | 1402 lm   | 379 lm          | 46.3lm/w   | 8.2W        | 4000k             | 580mm  |
| 5440515 | 1885 lm   | 510 lm          | 43.3lm/w   | 11.8W       | 3000k             | 580mm  |
| 5440516 | 1901 lm   | 515 lm          | 43.6lm/w   | 11.8W       | 4000k             | 580mm  |
| 5441315 | 1983 lm   | 537 lm          | 43.7lm/w   | 12.3W       | 3000k             | 860mm  |
| 5441316 | 2103 lm   | 570 lm          | 46.3lm/w   | 12.3W       | 4000k             | 860mm  |
| 5441515 | 2827 lm   | 766 lm          | 46.3lm/w   | 17.7W       | 3000k             | 860mm  |
| 5441516 | 2851 lm   | 772 lm          | 43.6lm/w   | 17.7W       | 4000k             | 860mm  |
| 5442315 | 2644 lm   | 716 lm          | 43.7lm/w   | 16.4W       | 3000k             | 1140mm |
| 5442316 | 2804 lm   | 760 lm          | 46.3lm/w   | 16.4W       | 4000k             | 1140mm |
| 5442515 | 3770 lm   | 1021 lm         | 43.3lm/w   | 23.6W       | 3000k             | 1140mm |
| 5442516 | 3802 lm   | 1030 lm         | 43.6lm/w   | 23.6W       | 4000k             | 1140mm |
| 5443315 | 3305 lm   | 895 lm          | 43.7lm/w   | 20.5W       | 3000k             | 1420mm |
| 5443316 | 3505 lm   | 950 lm          | 46.3lm/w   | 20.5W       | 4000k             | 1420mm |
| 5443515 | 4712 lm   | 1277 lm         | 43.7lm/w   | 29.5W       | 3000k             | 1420mm |
| 5443516 | 4752 lm   | 1287 lm         | 43.6lm/w   | 29.5W       | 4000k             | 1420mm |
| 5444315 | 3966 lm   | 1074 lm         | 43.7lm/w   | 24.6W       | 3000k             | 1700mm |
| 5444316 | 4206 lm   | 1139 lm         | 46.3lm/w   | 24.6W       | 4000k             | 1700mm |
| 5444515 | 5655 lm   | 1532 lm         | 43.3lm/w   | 35.4W       | 3000k             | 1700mm |
| 5444516 | 5703 lm   | 1545 lm         | 43.6lm/w   | 35.4W       | 4000k             | 1700mm |

# LIT-40200


IP67 surface mounted linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.

## LIT-40200 | Outdoor Linear Lighting | Surface



| H(m) | Diameter(m) | (lx) |
|------|-------------|------|
| 1.0  | 3.25        | 418  |
| 2.0  | 6.51        | 104  |
| 3.0  | 9.76        | 46   |
| 4.0  | 13.01       | 26   |
| 5.0  | 16.26       | 17   |

■ Co-C180

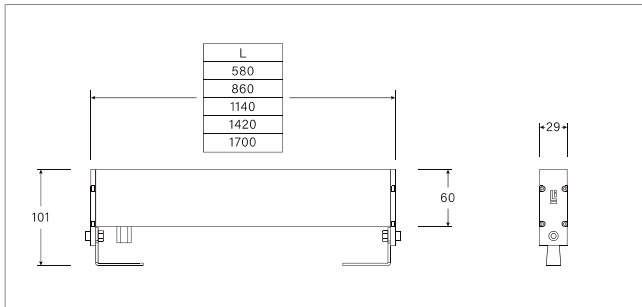

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C       |
| Body material                     | Extruded Aluminium                   |
| Dimensions & Weight               | L x 101 x 29mm    1.26 kg per 120 cm |
| Colors                            | Dark grey                            |
| Diffuser                          | Clear glass                          |
| Power supply                      | Electronic Driver                    |
| Reflector                         | Asymmetrical optical lens            |

### Related Products:




### Linear lens version:

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5420315 | 1322 lm   | 729 lm          | 88.9lm/w   | 8.2W        | 3000k             | 580mm  |
| 5420316 | 1402 lm   | 773 lm          | 94.3lm/w   | 8.2W        | 4000k             | 580mm  |
| 5420515 | 1885 lm   | 1039 lm         | 88lm/w     | 11.8W       | 3000k             | 580mm  |
| 5420515 | 1901 lm   | 1048 lm         | 88.8lm/w   | 11.8W       | 4000k             | 580mm  |
| 5421315 | 1983 lm   | 1093 lm         | 88.9lm/w   | 12.3W       | 3000k             | 860mm  |
| 5421316 | 2103 lm   | 1160 lm         | 94.3lm/w   | 12.3W       | 4000k             | 860mm  |
| 5421515 | 2827 lm   | 1559 lm         | 88lm/w     | 17.7W       | 3000k             | 860mm  |
| 5421516 | 2851 lm   | 1572 lm         | 88.8lm/w   | 17.7W       | 4000k             | 860mm  |
| 5422315 | 2644 lm   | 1458 lm         | 88.9lm/w   | 16.4W       | 3000k             | 1140mm |
| 5422316 | 2804 lm   | 1546 lm         | 94.3lm/w   | 16.4W       | 4000k             | 1140mm |
| 5422515 | 3770 lm   | 2079 lm         | 88lm/w     | 23.6W       | 3000k             | 1140mm |
| 5422516 | 3802 lm   | 2096 lm         | 88.9lm/w   | 23.6W       | 4000k             | 1140mm |
| 5423315 | 3305 lm   | 1822 lm         | 88.9lm/w   | 20.5W       | 3000k             | 1420mm |
| 5423316 | 3505 lm   | 1932 lm         | 94.3lm/w   | 20.5W       | 4000k             | 1420mm |
| 5423516 | 4712 lm   | 2598 lm         | 88lm/w     | 29.5W       | 3000k             | 1420mm |
| 5423516 | 4752 lm   | 2620 lm         | 88.8lm/w   | 29.5W       | 4000k             | 1420mm |
| 5424315 | 3966 lm   | 2187 lm         | 88.9lm/w   | 24.6W       | 3000k             | 1700mm |
| 5424316 | 4206 lm   | 2319 lm         | 94.3lm/w   | 24.6W       | 4000k             | 1700mm |
| 5424515 | 5655 lm   | 3118 lm         | 88lm/w     | 35.4W       | 3000k             | 1700mm |
| 5424516 | 5703 lm   | 3144 lm         | 88.8lm/w   | 35.4W       | 4000k             | 1700mm |

# LIT-40200

IP67 surface mounted individual lens wall washer made of tough aluminum casing, optical lens, and clear diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.


LIT-40200 | Outdoor Linear Lighting | Surface




| H(m) | Diameter(m) | (lx) |
|------|-------------|------|
| 1.0  | 0.59        | 8048 |
| 2.0  | 1.18        | 2012 |
| 3.0  | 1.76        | 894  |
| 4.0  | 2.35        | 503  |
| 5.0  | 2.94        | 322  |

■ Co-C180

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C       |
| Body material                     | Extruded Aluminium                   |
| Dimensions & Weight               | L x 101 x 29mm    1.67 kg per 120 cm |
| Colors                            | Dark grey                            |
| Diffuser                          | Clear glass                          |
| Power supply                      | Electronic Driver                    |
| Reflector                         | Optical lens 15°                     |

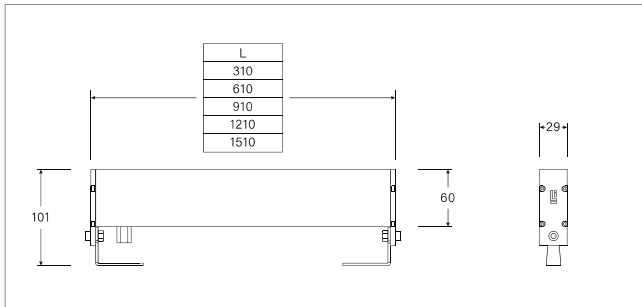

Related Products:



Individual lens version:




| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5400315 | 420 lm    | 360 lm          | 83.7lm/w   | 4.3W        | 3000k             | 310mm  |
| 5400316 | 420 lm    | 360 lm          | 93.7lm/w   | 4.3W        | 4000k             | 310mm  |
| 5400515 | 590 lm    | 505 lm          | 84.1lm/w   | 6W          | 3000k             | 310mm  |
| 5400516 | 590 lm    | 505 lm          | 84.1lm/w   | 6W          | 4000k             | 310mm  |
| 5401315 | 840 lm    | 720 lm          | 83.7lm/w   | 8.6W        | 3000k             | 610mm  |
| 5401316 | 840 lm    | 720 lm          | 83.7lm/w   | 8.6W        | 4000k             | 610mm  |
| 5401515 | 1180 lm   | 1010 lm         | 84.1lm/w   | 12W         | 3000k             | 610mm  |
| 5401516 | 1180 lm   | 1010 lm         | 84.1lm/w   | 12W         | 4000k             | 610mm  |
| 5402315 | 1260 lm   | 1080 lm         | 85.0lm/w   | 12.7W       | 3000k             | 910mm  |
| 5402316 | 1260 lm   | 1080 lm         | 85.0lm/w   | 12.7W       | 4000k             | 910mm  |
| 5402515 | 1770 lm   | 1515 lm         | 84.1lm/w   | 18W         | 3000k             | 910mm  |
| 5402516 | 1770 lm   | 1515 lm         | 84.1lm/w   | 18W         | 4000k             | 910mm  |
| 5403315 | 1680 lm   | 1440 lm         | 83.7lm/w   | 17.2W       | 3000k             | 1210mm |
| 5403316 | 1680 lm   | 1440 lm         | 83.7lm/w   | 17.2W       | 4000k             | 1210mm |
| 5403515 | 2360 lm   | 2020 lm         | 84.1lm/w   | 24W         | 3000k             | 1210mm |
| 5403516 | 2360 lm   | 2020 lm         | 84.1lm/w   | 24W         | 4000k             | 1210mm |
| 5404315 | 2100 lm   | 1800 lm         | 83.7lm/w   | 21.5W       | 3000k             | 1510mm |
| 5404316 | 2100 lm   | 1800 lm         | 83.7lm/w   | 21.5W       | 4000k             | 1510mm |
| 5404515 | 2950 lm   | 2525 lm         | 84.1lm/w   | 30W         | 3000k             | 1510mm |
| 5404516 | 2950 lm   | 2525 lm         | 84.1lm/w   | 30W         | 4000k             | 1510mm |



# LIT-40200

IP67 recessed in ground frosted linear lighting for guidance lighting made of tough aluminum casing, and opal diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.

LIT-40200 | Outdoor Linear Lighting | Recessed

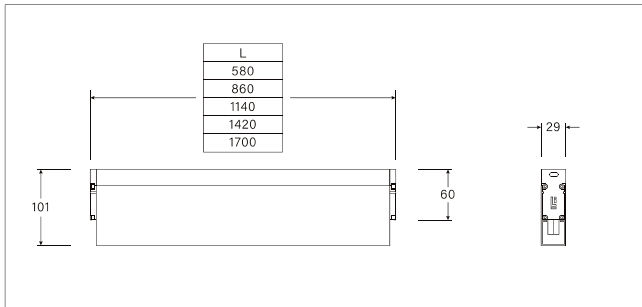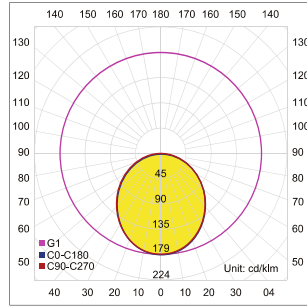

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C        |
| Body material                     | Extruded Aluminium                    |
| Dimensions & Weight               | L x 101 x 29mm     1.67 kg per 120 cm |
| Colors                            | Dark grey                             |
| Diffuser                          | Opal                                  |
| Power supply                      | Electronic Driver                     |
| Reflector                         | N/A                                   |

Related Products:




Opal version:

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5450315 | 1322 lm   | 358 lm          | 43.7lm/w   | 8.2W        | 3000k             | 580mm  |
| 5450316 | 1402 lm   | 379 lm          | 46.3lm/w   | 8.2W        | 4000k             | 580mm  |
| 5450515 | 1885 lm   | 510 lm          | 43.3lm/w   | 11.8W       | 3000k             | 580mm  |
| 5450516 | 1901 lm   | 515 lm          | 43.6lm/w   | 11.8W       | 4000k             | 580mm  |
| 5451315 | 1983 lm   | 537 lm          | 43.7lm/w   | 12.3W       | 3000k             | 860mm  |
| 5451316 | 2103 lm   | 570 lm          | 46.3lm/w   | 12.3W       | 4000k             | 860mm  |
| 5451515 | 2827 lm   | 766 lm          | 46.3lm/w   | 17.7W       | 3000k             | 860mm  |
| 5451516 | 2851 lm   | 772 lm          | 43.6lm/w   | 17.7W       | 4000k             | 860mm  |
| 5452315 | 2644 lm   | 716 lm          | 43.7lm/w   | 16.4W       | 3000k             | 1140mm |
| 5452316 | 2804 lm   | 760 lm          | 46.3lm/w   | 16.4W       | 4000k             | 1140mm |
| 5452515 | 3770 lm   | 1021 lm         | 43.3lm/w   | 23.6W       | 3000k             | 1140mm |
| 5452516 | 3802 lm   | 1030 lm         | 43.6lm/w   | 23.6W       | 4000k             | 1140mm |
| 5453315 | 3305 lm   | 895 lm          | 43.7lm/w   | 20.5W       | 3000k             | 1420mm |
| 5453316 | 3505 lm   | 950 lm          | 46.3lm/w   | 20.5W       | 4000k             | 1420mm |
| 5453515 | 4712 lm   | 1277 lm         | 43.7lm/w   | 29.5W       | 3000k             | 1420mm |
| 5453516 | 4752 lm   | 1287 lm         | 43.6lm/w   | 29.5W       | 4000k             | 1420mm |
| 5454315 | 3966 lm   | 1074 lm         | 43.7lm/w   | 24.6W       | 3000k             | 1700mm |
| 5454316 | 4206 lm   | 1139 lm         | 46.3lm/w   | 24.6W       | 4000k             | 1700mm |
| 5454515 | 5655 lm   | 1532 lm         | 43.3lm/w   | 35.4W       | 3000k             | 1700mm |
| 5454516 | 5703 lm   | 1545 lm         | 43.6lm/w   | 35.4W       | 4000k             | 1700mm |

# LIT-40200

IP67 recessed in ground linear lighting wall washer made of tough aluminum casing, optical lens, and clear diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.


LIT-40200 | Outdoor Linear Lighting | Recessed



| H(m) | Diameter(m) | (lx) |
|------|-------------|------|
| 1.0  | 3.25        | 418  |
| 2.0  | 6.51        | 104  |
| 3.0  | 9.76        | 46   |
| 4.0  | 13.01       | 26   |
| 5.0  | 16.26       | 17   |

■ Co-C180

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C       |
| Body material                     | Extruded Aluminium                   |
| Dimensions & Weight               | L x 101 x 29mm    1.26 kg per 120 cm |
| Colors                            | Dark grey                            |
| Diffuser                          | Clear glass                          |
| Power supply                      | Electronic Driver                    |
| Reflector                         | Asymmetrical optical lens            |

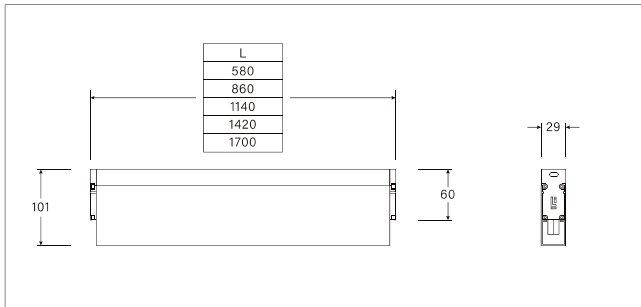

Related Products:




Linear lens version:

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5430315 | 1322 lm   | 729 lm          | 88.9lm/w   | 8.2W        | 3000k             | 580mm  |
| 5430316 | 1402 lm   | 773 lm          | 94.3lm/w   | 8.2W        | 4000k             | 580mm  |
| 5430515 | 1885 lm   | 1039 lm         | 88lm/w     | 11.8W       | 3000k             | 580mm  |
| 5430515 | 1901 lm   | 1048 lm         | 88.8lm/w   | 11.8W       | 4000k             | 580mm  |
| 5431315 | 1983 lm   | 1093 lm         | 88.9lm/w   | 12.3W       | 3000k             | 860mm  |
| 5431316 | 2103 lm   | 1160 lm         | 94.3lm/w   | 12.3W       | 4000k             | 860mm  |
| 5431515 | 2827 lm   | 1559 lm         | 88lm/w     | 17.7W       | 3000k             | 860mm  |
| 5431516 | 2851 lm   | 1572 lm         | 88.8lm/w   | 17.7W       | 4000k             | 860mm  |
| 5432315 | 2644 lm   | 1458 lm         | 88.9lm/w   | 16.4W       | 3000k             | 1140mm |
| 5432316 | 2804 lm   | 1546 lm         | 94.3lm/w   | 16.4W       | 4000k             | 1140mm |
| 5432515 | 3770 lm   | 2079 lm         | 88lm/w     | 23.6W       | 3000k             | 1140mm |
| 5432516 | 3802 lm   | 2096 lm         | 88.9lm/w   | 23.6W       | 4000k             | 1140mm |
| 5433315 | 3305 lm   | 1822 lm         | 88.9lm/w   | 20.5W       | 3000k             | 1420mm |
| 5433316 | 3505 lm   | 1932 lm         | 94.3lm/w   | 20.5W       | 4000k             | 1420mm |
| 5433516 | 4712 lm   | 2598 lm         | 88lm/w     | 29.5W       | 3000k             | 1420mm |
| 5433516 | 4752 lm   | 2620 lm         | 88.8lm/w   | 29.5W       | 4000k             | 1420mm |
| 5434315 | 3966 lm   | 2187 lm         | 88.9lm/w   | 24.6W       | 3000k             | 1700mm |
| 5434316 | 4206 lm   | 2319 lm         | 94.3lm/w   | 24.6W       | 4000k             | 1700mm |
| 5434515 | 5655 lm   | 3118 lm         | 88lm/w     | 35.4W       | 3000k             | 1700mm |
| 5434516 | 5703 lm   | 3144 lm         | 88.8lm/w   | 35.4W       | 4000k             | 1700mm |

# LIT-40200

IP67 recessed in ground individual lens wall washer made of tough aluminum casing, optical lens, and clear diffuser. A walk over fixture that ensures long-lasting performance with a sleek, minimal appearance.


LIT-40200 | Outdoor Linear Lighting | Recessed




| H(m) | Diameter(m) | (lx) |
|------|-------------|------|
| 1.0  | 0.59        | 8048 |
| 2.0  | 1.18        | 2012 |
| 3.0  | 1.76        | 894  |
| 4.0  | 2.35        | 503  |
| 5.0  | 2.94        | 322  |

■ Co-C180

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Lumen, maintenance & failure rate | L70/B50<br>>60,000 hrs at 45°C       |
| Body material                     | Extruded Aluminium                   |
| Dimensions & Weight               | L x 101 x 29mm    1.67 kg per 120 cm |
| Colors                            | Dark grey                            |
| Diffuser                          | Clear glass                          |
| Power supply                      | Electronic Driver                    |
| Reflector                         | Optical lens 15°                     |

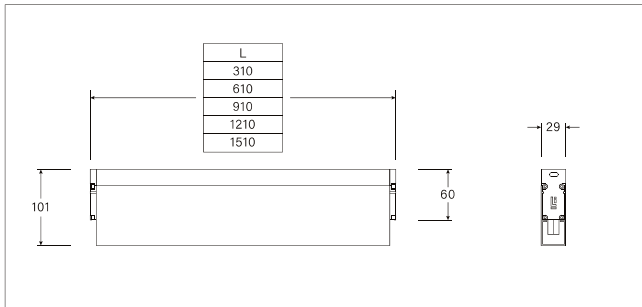

Related Products:



Individual lens version:

| Code    | LED lumen | Luminaire lumen | Efficiency | LED wattage | Color temperature | Length |
|---------|-----------|-----------------|------------|-------------|-------------------|--------|
| 5410315 | 420 lm    | 360 lm          | 83.7lm/w   | 4.3W        | 3000k             | 310mm  |
| 5410316 | 420 lm    | 360 lm          | 93.7lm/w   | 4.3W        | 4000k             | 310mm  |
| 5410515 | 590 lm    | 505 lm          | 84.1lm/w   | 6W          | 3000k             | 310mm  |
| 5410516 | 590 lm    | 505 lm          | 84.1lm/w   | 6W          | 4000k             | 310mm  |
| 5411315 | 840 lm    | 720 lm          | 83.7lm/w   | 8.6W        | 3000k             | 610mm  |
| 5411316 | 840 lm    | 720 lm          | 83.7lm/w   | 8.6W        | 4000k             | 610mm  |
| 5411515 | 1180 lm   | 1010 lm         | 84.1lm/w   | 12W         | 3000k             | 610mm  |
| 5411516 | 1180 lm   | 1010 lm         | 84.1lm/w   | 12W         | 4000k             | 610mm  |
| 5412315 | 1260 lm   | 1080 lm         | 85.0lm/w   | 12.7W       | 3000k             | 910mm  |
| 5412316 | 1260 lm   | 1080 lm         | 85.0lm/w   | 12.7W       | 4000k             | 910mm  |
| 5412515 | 1770 lm   | 1515 lm         | 84.1lm/w   | 18W         | 3000k             | 910mm  |
| 5412516 | 1770 lm   | 1515 lm         | 84.1lm/w   | 18W         | 4000k             | 910mm  |
| 5413315 | 1680 lm   | 1440 lm         | 83.7lm/w   | 17.2W       | 3000k             | 1210mm |
| 5413316 | 1680 lm   | 1440 lm         | 83.7lm/w   | 17.2W       | 4000k             | 1210mm |
| 5413515 | 2360 lm   | 2020 lm         | 84.1lm/w   | 24W         | 3000k             | 1210mm |
| 5413516 | 2360 lm   | 2020 lm         | 84.1lm/w   | 24W         | 4000k             | 1210mm |
| 5414315 | 2100 lm   | 1800 lm         | 83.7lm/w   | 21.5W       | 3000k             | 1510mm |
| 5414316 | 2100 lm   | 1800 lm         | 83.7lm/w   | 21.5W       | 4000k             | 1510mm |
| 5414515 | 2950 lm   | 2525 lm         | 84.1lm/w   | 30W         | 3000k             | 1510mm |
| 5414516 | 2950 lm   | 2525 lm         | 84.1lm/w   | 30W         | 4000k             | 1510mm |

