
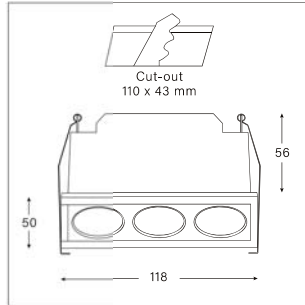
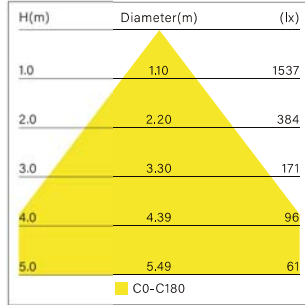


LIT-5310

Recessed rectangular downlight with three optical lenses featuring a minimal design. The perfect solution for a more subtle illumination. Ideal for projects with challenging ceiling applications (e.g. concrete, no void).

LIT-5310 | Rectangular spotlight | Recessed



| | |
|-----------------------------------|---|
| Lumen, maintenance & failure rate | L80/B10 >55,000 hrs at 25°C |
| Body material | Aluminium |
| Dimensions & Weight | 118 x 50 x 56mm 0.24 kg |
| Colors | White (other colors available upon request) |
| Diffuser | N/A |
| Power supply | Electronic driver |
| Reflector | Optical lens + black reflector |

Customizable on request


Dimmable

>90
CRI

Color
Temperature

*Longer lead time

| Code | LED Lumen | Luminaire Lumen | Efficiency | LED Wattage | Color Temperature | Beam Angle |
|---------|-----------|-----------------|------------|-------------|-------------------|------------|
| 6313831 | 800 lm | 554 lm | 60.3lm/w | 6.3W | 3000k | 36° |
| 6313832 | 800 lm | 554 lm | 60.3lm/w | 6.3W | 4000k | 36° |

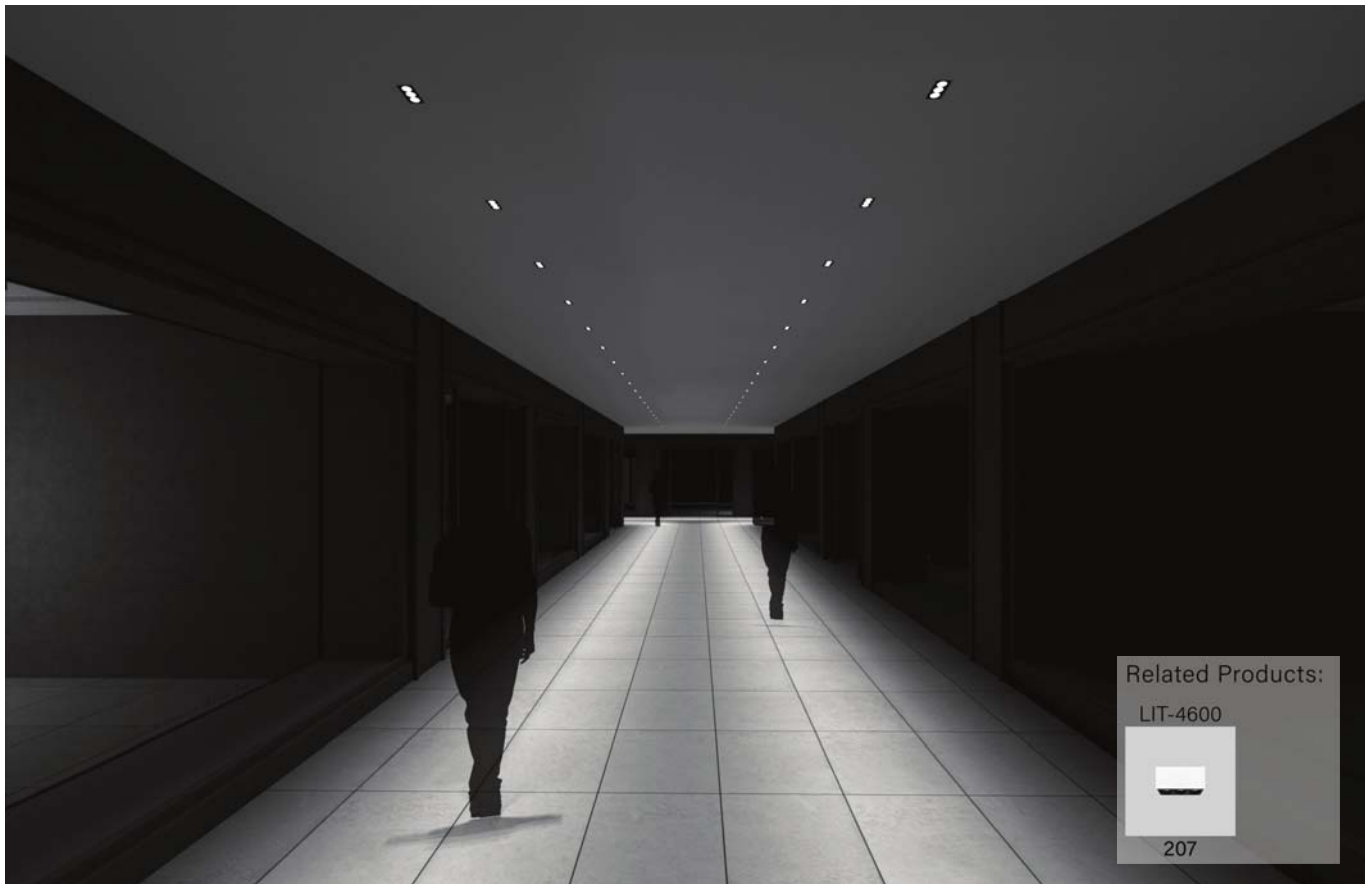

Related Products:


LIT-4600

207

LIT-5310


Recessed rectangular downlight with six optical lenses featuring a minimal design. The perfect solution for a more subtle illumination. Ideal for projects with challenging ceiling applications (e.g. concrete, no void),

LIT-5310 | Rectangular spotlight | Recessed




| H(m) | Diameter(m) | (lx) |
|------|-------------|------|
| 1.0 | 1.10 | 1537 |
| 2.0 | 2.20 | 384 |
| 3.0 | 3.30 | 171 |
| 4.0 | 4.39 | 96 |
| 5.0 | 5.49 | 61 |

■ C0-C180

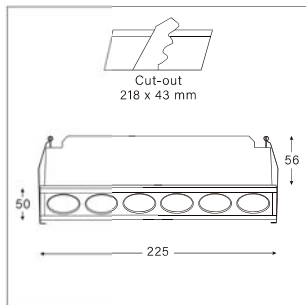


| | |
|-----------------------------------|---|
| Lumen, maintenance & failure rate | L80/B10 >55,000 hrs at 25°C |
| Body material | Aluminium |
| Dimensions & Weight | 225 x 50 x 56mm 0.43 kg |
| Colors | White (other colors available upon request) |
| Diffuser | N/A |
| Power supply | Electronic driver |
| Reflector | Optical lens + black reflector |


Customizable on request



Dimmable



>90
CRI



Color
Temperature

*Longer lead time

| Code | LED Lumen | Luminaire Lumen | Efficiency | LED Wattage | Color Temperature | Beam Angle |
|---------|-----------|-----------------|------------|-------------|-------------------|------------|
| 5598421 | 830 lm | 572 lm | 63.5lm/w | 9.0W | 3000k | 24° |
| 5598422 | 830 lm | 572 lm | 63.5lm/w | 9.0W | 4000k | 24° |
| 5598821 | 1100 lm | 760 lm | 60.3lm/w | 12.6W | 3000k | 24° |
| 5598822 | 1100 lm | 760 lm | 60.3lm/w | 12.6W | 4000k | 24° |



Related Products:

LIT-4600



207