
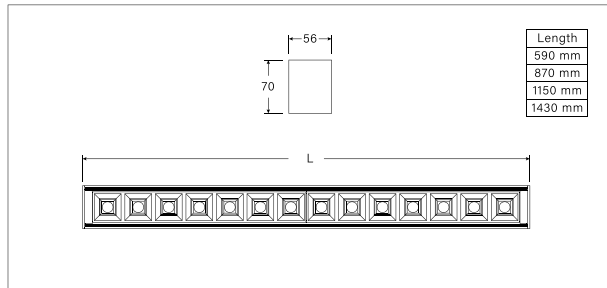
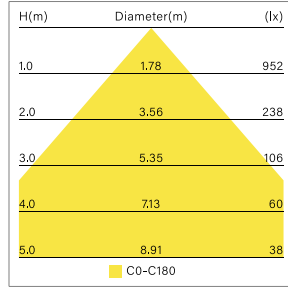
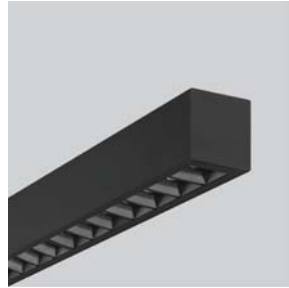


LIT-SYS LA55

Ceiling-mounted linear LED lighting system with UGR < 16. A contemporary lighting solution for architectural spaces. Used continuously mounted or as a stand-alone luminaire, it offers the flexibility to create various geometric shapes.

LIT-SYS LA55 | Linear Systems | Surface



Lumen, maintenance & failure rate	L80/F10 >55,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 70mm W 56mm 3.35 kg per 113cm
Colors	Check colors index
Diffuser	Optical lens + anti-glare reflector
Power supply	Electronic driver
Mounting	Surface mounting

Customizable on request

- Dimmable
- Custom length
- Corner connection

*Longer lead time


Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
744120X	1757 lm	1520 lm	158.3lm/w	9.6W	3000k	590mm
744121X	2460 lm	2128 lm	158.8lm/w	13.4W	3000k	590mm
744220X	2636 lm	2280 lm	158.3lm/w	14.4W	3000k	870mm
744221X	3690 lm	3192 lm	158.8lm/w	20.1W	3000k	870mm
744320X	3514 lm	3040 lm	158.4lm/w	19.2W	3000k	1150mm
744321X	4920 lm	4256 lm	158.8lm/w	26.8W	3000k	1150mm
744420X	4393 lm	3800 lm	158.4lm/w	24W	3000k	1430mm
744421X	6150 lm	5320 lm	158.8lm/w	33.5W	3000k	1430mm
744120Y	1861 lm	1610 lm	167.7lm/w	9.6W	4000k	590mm
744121Y	2605 lm	2254 lm	168.2lm/w	13.4W	4000k	590mm
744220Y	2792 lm	2415 lm	167.7lm/w	14.4W	4000k	870mm
744221Y	3908 lm	3381 lm	168.2lm/w	20.1W	4000k	870mm
744320Y	3722 lm	3220 lm	167.7lm/w	19.2W	4000k	1150mm
744321Y	5210 lm	4508 lm	168.2lm/w	26.8W	4000k	1150mm
744420Y	4653 lm	4025 lm	167.7lm/w	24W	4000k	1430mm
744421Y	6513 lm	5635 lm	168.2lm/w	33.5W	4000k	1430mm

Code	White	Black
X	1	7
Y	2	8

Related Products:






LIT-6100

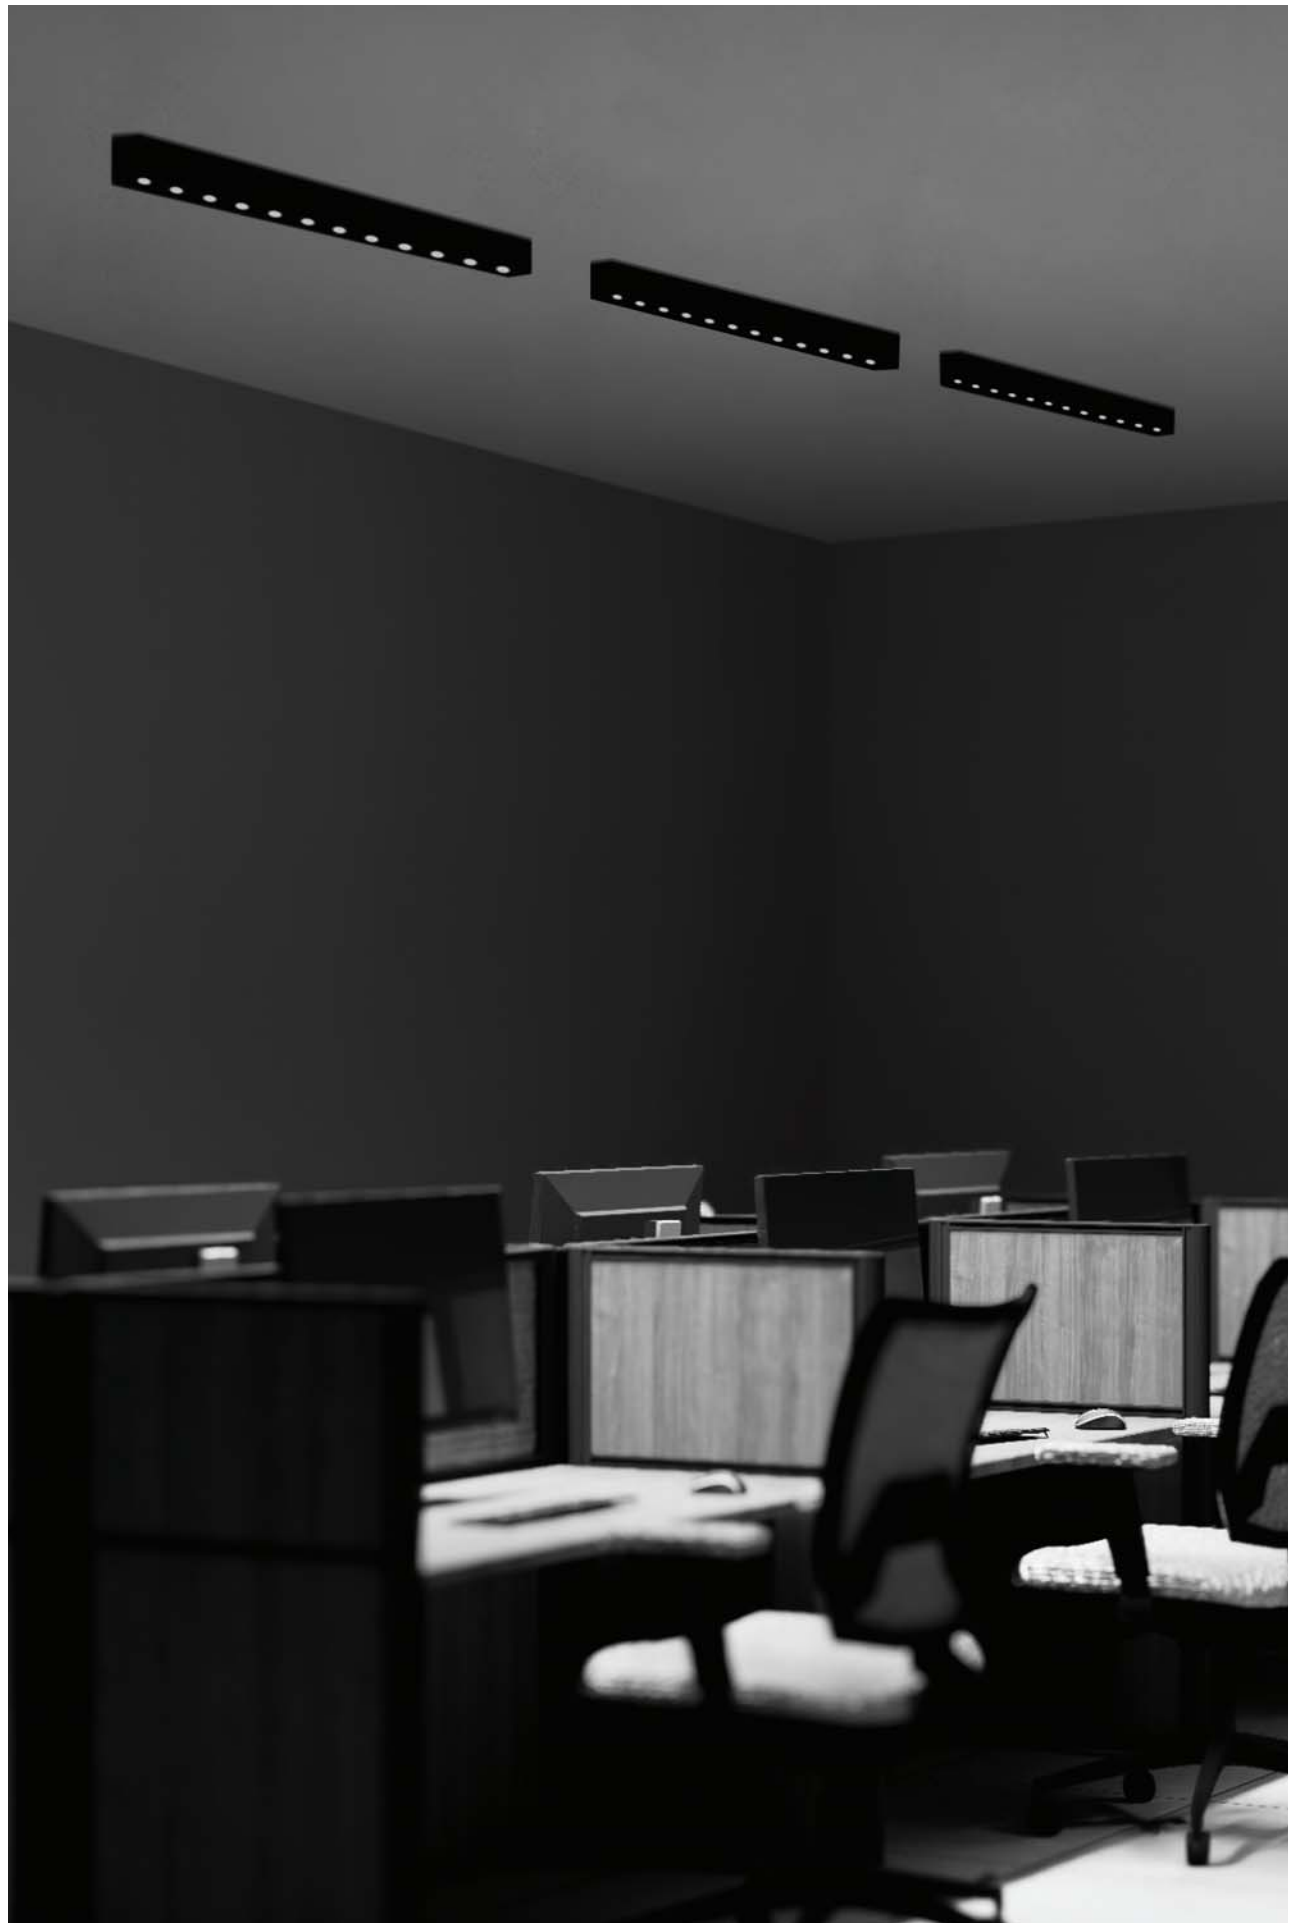


LIT-SYS LA55

Ceiling-mounted linear LED lighting system with UGR < 16. A contemporary lighting solution for architectural spaces. Used continuously mounted or as a stand-alone luminaire, it offers the flexibility to create various geometric shapes.

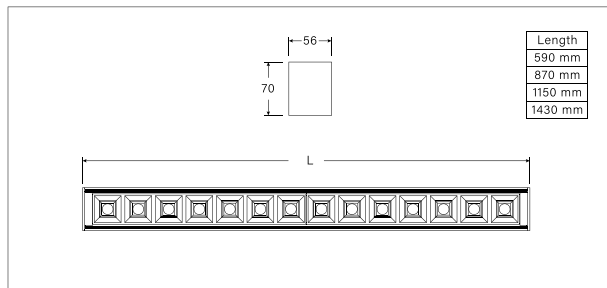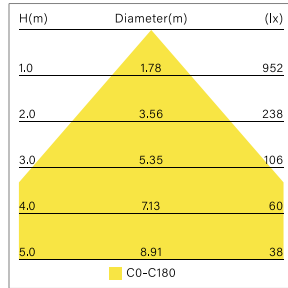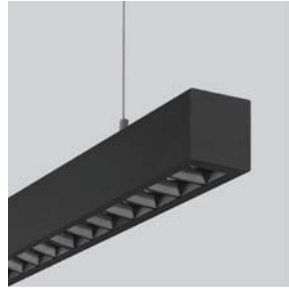


LIT-SYS LA55 | Linear Systems | Suspended



Lumen, maintenance & failure rate	L80/F10 >55,000 hrs at 25°C
Body material	Aluminium
Dimensions & Weight	H 70mm W 56mm 3.35 kg per 113cm
Colors	Check colors index
Diffuser	Optical lens + anti-glare reflector
Power supply	Electronic driver
Mounting	Surface mounting

Customizable on request



*Longer lead time

Code	LED Lumen	Luminaire Lumen	Efficiency	LED Wattage	Color Temperature	Length
745120X	1757 lm	1520 lm	158.3lm/w	9.6W	3000k	590mm
745121X	2460 lm	2128 lm	158.8lm/w	13.4W	3000k	590mm
745220X	2636 lm	2280 lm	158.3lm/w	14.4W	3000k	870mm
745221X	3690 lm	3192 lm	158.8lm/w	20.1W	3000k	870mm
745320X	3514 lm	3040 lm	158.4lm/w	19.2W	3000k	1150mm
745321X	4920 lm	4256 lm	158.8lm/w	26.8W	3000k	1150mm
745420X	4393 lm	3800 lm	158.4lm/w	24W	3000k	1430mm
745421X	6150 lm	5320 lm	158.8lm/w	33.5W	3000k	1430mm
745120Y	1861 lm	1610 lm	167.7lm/w	9.6W	4000k	590mm
745121Y	2605 lm	2254 lm	168.2lm/w	13.4W	4000k	590mm
745220Y	2792 lm	2415 lm	167.7lm/w	14.4W	4000k	870mm
745221Y	3908 lm	3381 lm	168.2lm/w	20.1W	4000k	870mm
745320Y	3722 lm	3220 lm	167.7lm/w	19.2W	4000k	1150mm
745321Y	5210 lm	4508 lm	168.2lm/w	26.8W	4000k	1150mm
745420Y	4653 lm	4025 lm	167.7lm/w	24W	4000k	1430mm
745421Y	6513 lm	5635 lm	168.2lm/w	33.5W	4000k	1430mm

Code	White	Black
X	1	7
Y	2	8

Related Products:

LIT-6100



212

